Environmental and Social Management Plan

September 2023

AIIB Loan - 0446A: CAM - National Restoration of Rural Productive Capacity Project

(Contract No: NRRPCP/22/NCB/WRR-5: Lot 1)

Memae - Meaek Puk DBST and RC Road, Memot district, Tbuong Khmum province.

CURRENCY EQUIVALENTS (September 2023)

Currency Unit-Cambodian Riel (KHR) 1\$=4,111 KHR; KHR=0.00024\$

ABBREVIATIONS

	ABBREVIATIONS
AP	Affected Person
AIIB	Asian Infrastructure Investment Bank
BER	Bid Evaluation Report
BoQ	Bill of Quantities
CEMP	
	Contractor's Environmental Management Plan
CoVID-19	Coronavirus disease of 2019
DA	Designated Account
DBST	Double Bituminous Surface Treatment
DED	Detailed Engineering Design
EA	Executing Agency
ESCoP	Environmental and Social Code of Practice
EMP	Environmental Management Plan
ESP	Environment and Social Plan
ESMP	Environmental and Social Management Plan
ESMPF	Environmental and Social Management Planning Framework
ESS	Environmental and Social Safeguards
FM	Financial Management
FMS	Financial Management System
GAP	Gender Action Plan
GDR	
	General Department of Resettlement
GRM	Grievance Redress Mechanism
ICB	International Competitive Bidding
IEE	Initial Environmental Examinations
IPP	Indigenous Peoples Plan
IPPF	Indigenous People's Planning Framework
IRC	Inter-ministerial Resettlement Committee
M&E	Monitoring and Evaluation
MEF	Ministry of Economy and Finance
MRD	
	Ministry of Rural Development
NCB	National Competitive Bidding
NRRPCP	National Rural Restoration of Productive Capacity Project
PAP	Project Affected Persons
RC	Reinforced concrete
PDRD	Provincial Department of Rural Development
PIB	Project Information Booklet
PIU	Project Implementation Unit
PMU	Project Management Unit
POM	Project Operational Manual
PRSC	Provincial Resettlement Sub-committee
PPE	Personal Protective Equipment
RF	Resettlement Framework
GKC	The Government of the Kingdom of Cambodia
RPF	Resettlement Planning Framework
SDG	Sustainable Development Goal
SoE	Statement of Expenditure
SOP	Standard Operating Procedures
TA	Technical Assistance
ToR	Terms of Reference
WG	Working Group
WSUG	Water and Sanitation User Group
	WEIGHTS AND MEASURES

ha	_	hectare
km	_	Kilometre
m	_	Meter
lm	_	Linear meter
m²	_	square meter
m ³	-	cubic meter

NOTE

In this report, "\$" refers to US dollars.

SUMMARY OF SUBPROJECT

Name of subproject	Memae - Meaek	Puk DBST ar	nd RC road subp	project						
Province	Tnuong Khmum	Districts	Memot	Commu	ines	Dar & Ponhea Kraek				
Contract No.	NRRPCP/22/NC	B/WRR-5: Lo	t 1	Ref. No.		TKM4				
Description		The subproject includes the rehabilitation of an existing laterite road with a length or meters to a DBST and RC road with a base-width of 10 meters.								
Cost Estimate (US\$)	\$1,782,500									
Right of Way	30.0 meters (for	provincial roa	d)	Da	ate	28 August 2023				
Length	11,231 meters	Existing base width	5.0 meters	Propose width	ed base	10.0 to 18.0 meters (in elevated sections)				
Area of additional land needed (m ²)	63,455 m ² (with	in the RoW)	Other assets lost			None				
Extra land area for Col (m ²)			22,462 m ² (with	hin the Ro	W)					
			No. of elderly	y HH head	ds	0				
No. of Affected Persons	6 AP	S	No. of FHHs			0				
			No. of ID Poo	or HHs	0					
Environment		winor and temporary Social No tre				es removed within the RoW				
Involuntary resettlement	No impact on priviland	-	Indigenous I	Peoples	None residing in these communes					
Impact on AHs										
Crop production	No im	pact on any c	rops							
Trees	No	trees remove	d	Total						
Fences/Structures	25 meters of fe extended roofs			allowan	ces:	None				
E & S Category	(Minor	disturbance	CATEG s due to the civ		nd remov	al of 55 trees)				
Public consultation	meetings									
	Date	No. of p	articipants	No. of	women	No. of APs				
1 st meetings	15-Jun-23		14	:	2	-				
2 nd meetings	22-Jun-23		48	1	2	-				
Preparation of ESMI	P									
	1 st Draft	1	Revised	Fi	nal	-				
Date of preparation	15-Sep-23									
Date of comment										

TABLE OF CONTENTS

1.	INTRODUCTION1
2.	PROJECT BACKGROUND1
2.1	Project Description1
2.2	Selection criteria for subproject1
3.	SUBPROJECT DESCRIPTION1
3.1	Proposed subproject1
3.2	Technical specifications4
3.3	Subproject Design and land Requirements4
4.	BASELINE ENVIRONMENTAL AND SOCIAL CONTEXT
4.1	Environmental Context5
4.2	Social context5
5.	ENVIRONMENTAL AND SOCIAL IMPACTS AND MITIGATION MEASURES
5.1	Public consultation meetings6
5.2	Rapid Environmental and Social Screening Assessment6
5.3	Climate Risk Screening7
5.4	Description of social characteristics of subproject site7
5.5	Land acquisition and resettlement screening7
5.6	Identification of Affected Persons7
5.7	Identification of vulnerable households7
5.8	Indigenous Peoples7
5.9	Environmental and Social Categorization7
6.	GRIEVANCE REDRESS MECHANISM
7.	ANALYSIS OF ALTERNATIVES9
7.1	Summary of all mitigation actions9
7.2	Comparison with no subproject scenario9
7.3	Discussion of benefits to local community to offset against impacts10
8.	CONCLUSIONS AND RECOMMENDATIONS10

Annex 1: Socio-economic data

- Annex 2: Existing and proposed road widths and tree/asset removal
- Annex 3: Certification of Right of Way
- Annex 4: Rapid Environmental and Social Assessment Checklist
- Annex 5: Environment and Social Impact Analysis
- Annex 6: Preliminary Climate Risk Screening Checklist
- Annex 7: L:and acquisition and resettlement screening checklist
- Annex 8: Public consultation meetings
- Annex 9: Certificates of Land/Asset Transfer
- Annex 10: Inventory of Loss
- Annex 11: Project Information Booklet
- Annex 12: Environmental and Social code of Practice
- Annex 13: Environmental and Social Monitoring Plan

ENVIRONMENTAL AND SOCIAL MANAGEMENT PLAN

Chambak - Chan Mul DBST and RC road subproject: Rung & Chan Mul communes, Ponhea Kraek district, Tbuong Khmum province.

1. INTRODUCTION

1. The objective of this report is to present the results of the environmental and social safeguard due diligence process for the proposed DBST and RC rural road subproject linking Memae village in Ponhea Kraek commune with Meaek Puk village in Dar commune, and also Srae Choam and Spean villages in Dar commune in Tbuong Khmum province. The report provides a description of the existing road, an overview of the socio-economic situation within the subproject area, a description of the consultative processes that were completed within the subproject area, an environmental assessment to identify any potential adverse impacts and the identification of appropriate mitigation steps, the screening process to identify any affected persons (APs), the determination of whether any of the APs are vulnerable, an assessment of the need for any additional land or for the removal of any assets within the Right of Way (RoW) and the mechanism for compensation, and describes the Grievance Redress Mechanism (GRM) that has been established for the proposed subproject.

2. PROJECT BACKGROUND

2.1 **Project Description**

2. The Government of Kingdom of Cambodia (GoKC) has received a loan from Asian Infrastructure Investment Bank (AIIB) in the form of a loan to assist in financing the National Restoration of Rural Productive Capacity Project (NRRPCP). This Project has been identified as an immediate priority of the GKC CoVID-19 response and is a part of the proposed comprehensive rural infrastructure program to be funded under the AIIB CoVID-19 Crisis Response Facility to strengthen the GKC financial resources that have been impacted by the pandemic.

3. The Executing Agency (EA) for NRRPCP is the Ministry of Rural Development (MRD) and is responsible for overall Project coordination, planning, financial management, procurement and monitoring and evaluation (M&E). The target Project provinces are Pailin (PLN), Kampong Chhnang (KPC), Tboung Khmum (TKM), Prey Veng (PVG) and Koh Kong (KKG). The Project implementation period is from February 2021 to June 2024.

4. The Project objective is to sustain the rural economy and livelihoods of vulnerable rural population and returning migrants affected by CoVID-19 pandemic. The civil works for rural road (subcomponent A1) is the upgrading 235 kilometers of existing rural roads with climate proofing, adaptation of unstable bridges and collapsed drainage systems to improve access to markets, schools and health centers and sustain urban-rural linkages within the provinces as well as with the national capital and increase climate resilience; and greening of the embankments using nature-based solutions and indigenous materials to accommodate safe walking and cycling and promote rural roads' safety.

2.2 Selection criteria for subproject

5. In consultation with the provincial Project Implementation Units (PIUs), the Project Management Unit (PMU) has now identified a total of 20 potential subprojects with a total length of 290 kilometers. The selected rural roads have been identified from those prioritized at sub-national level (commune and district) and is a part of the government decentralized annual development planning process.

3. SUBPROJECT DESCRIPTION

3.1 Proposed subproject


6. This road subproject is located in Memot and Ponhea Kraek districts in Tboung Khmum province. It commences from Memae village and runs in a northeast direction to Kratie province and ends at Meak Puk village (see Figure 1), and another section of the subproject connects from Srae Chroam village and runs to ward east in the direction of the Vietnam border. This road runs through open fields of casava, pepper, rubber tree and other high-value crops. It also passes through several villages with moderately populated areas. This road crosses through three communes namely Kraek, Tuek Chroy and Dar with an 11.50 km total length and it plays a prominent role in serving the local people from those three communes to transport their agriculture products to Memot/Ponhea Kraek district center or Vietnam. The existing road is poor laterite and during the harvest season, there are many

heavy trucks and Koyunt (semi- trucks) that access this road and it also serves for the local people to access the health center, school, or other public services. The current condition of the road is very bad with almost continuous damage and potholes along the entire road length that create difficulties for travelling, especially during the rainy season, and the farmers are have difficulty in using the road to transport their agricultural products to Memot district/Ponhea Kraek center or to Vietnam. There are a number of existing structures along this road which included, 4 concrete bridges, and 12 pipe culverts.



Figure 1: Satellite image of subproject location

Figure 2: Map of subproject location

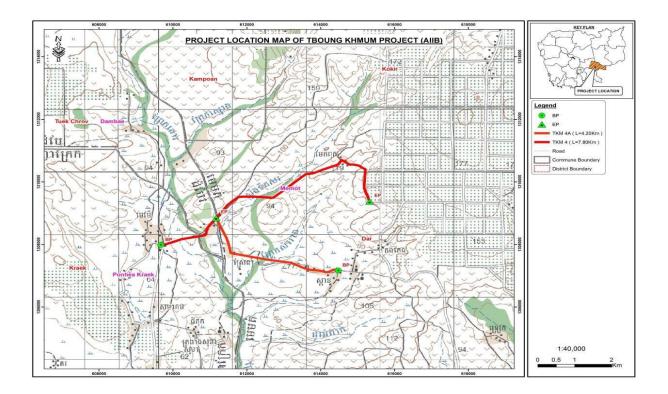

Environmental and Social Management Plan Memae - Meaek Puk DBST and RC road subproject, TKM4 (WRR5 - Lot 1)

Figure 3: Photos of existing road







PK1+120



PK1+380



PX2+140



Sta. 6+250, Bridge 2 span 7x18, good, TKM4





Sta. 2+050, Bridge 2 span 7mx24m, good, TKM4



7. The road will be upgraded to a DBST and RC road along the existing road alignment with a proposed road base-width that ranges from 10.0 to 18.0 meters and with a total length of 11,231 meters.

8. The road does not experience any serious flooding, but some evidence of minor flooding was noted on some sections (PK0+100 to PK1+100, PK3+350 to PK3+800). Most of the floods are caused by rainwater due to insufficient drainage structures. It was noted that some of the existing pipe culverts are in poor condition and will need to be replaced and the drainage needs to be improved in some sections to prevent flooding.

9. The road upgrading will be conducted within the official Right of Way (RoW) that is officially declared as 30.0 meters for provincial roads.¹ Since the road will be constructed within the existing alignment there will be no requirement for any additional land and there will be only minor temporary impacts on the properties and livelihoods of local residents during the civil work.

3.2 Technical specifications

10. The DBST and RC road has been designed with a carriageway of 6.0 meters and one-meter shoulder on each side with an embankment that varies depending on the elevation of the road that results in a base width that ranges from 8.0 to 18.0 meters (PK 3+100) along the length of the road. The cross-fall of the carriageway is planned to be 3% in consideration of the design speed and pavement type (DBST), surface drainage and vehicle speed. The pavement thickness has been determined using MPWT Technical Standards (2003) on present traffic volumes of 375 mm for base and sub-base course with DBST but increased to 430 mm (200 mm for sub-base and 230 mm for aggregate base) to reflect the increasing volumes of future traffic volume and the likelihood of heavier tricks using the road. The embankments have an average gradient of 1:2 with some adjustment depending on the material sources for banking.

3.3 Subproject Design and land Requirements

11. Based upon the proposed design of the road there has been a calculation of the additional land requirements due to the road widening and also including the additional one meter strip of land on each side of the proposed road base-width that is a part of the Corridor of Impact (CoI) that will be used temporarily during the construction period.² This calculation shows that the road widening will require an additional land area of 63,455 square meters for the road construction, while the strips of land on each side of road that will be used temporarily during the construction and during the construction comprise an additional 22,462 square meters.


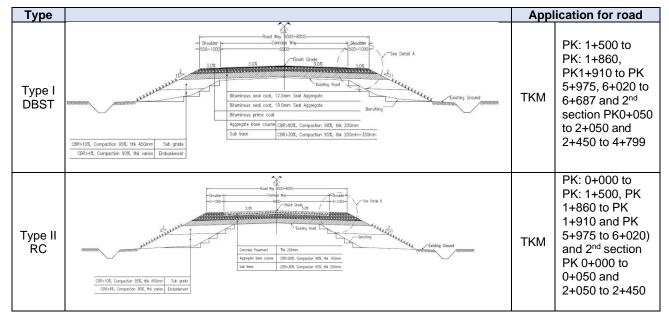


Figure 4: Typical cross section of proposed road

² See Annex 2 for the tabulation of the existing and proposed based width of the road for all sections together with the number of trees affected.

¹ See Annex 3 for the official Certification of Right of Way issued by the District Governor of Memot.

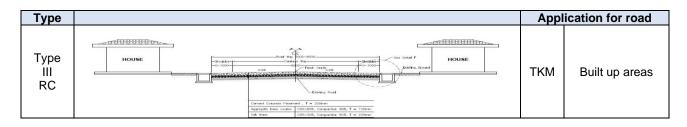

12. However, since the official Right of Way (RoW) of the road is 30.0 meters, and all of the additional land that will be required lies within this width, there will be no impacts on privately owned land.³ There will be some minor impacts on assets that have been planted or erected within the RoW by villagers residing along the roadside such as shrubs and other vegetation and no trees that will need to be removed, some extended zinc roofs (with total area of 14 square meters) one stairway that will need to be dismantled and wire or stone fences (with total length of 35 meters) will need to be moved back. However, during the public consultation meetings there were no objections raised to these impacts and the APs who claimed ownership of these trees and other structures have agreed voluntarily to their removal for the road construction.

4. BASELINE ENVIRONMENTAL AND SOCIAL CONTEXT

4.1 Environmental Context

13. **Vegetation:** The entire length of the rural road is clear of natural forest, but there are various types of trees growing along the roadside and there will be some minor impacts due only to the removal some small shrubs that are growing close to the roadside.

14. **Surface water:** There are no significant water bodies such as permanent rivers or lakes observed along the length of the road.

15. **Land use/agriculture:** The land surrounding the road consists primarily of rice fields and some residential plots of land. The proposed DBST and RC road will be constructed within the existing alignment and although there is minor widening of the road in some sections there will be no impact on the existing land use along the entire length of the road.

16. **Receptors and Access:** The road construction will have some minor impacts on human receptors during the civil work, and one healthcare facility was near the start of the road line.

4.2 Social context

17. **Demography**: There are 1,609 households in the four villages along the road line with a population of 6,073 and there are 194 vulnerable households identified.⁴

18. **Educational status:** The educational profile of people in the two communes is similar. The average proportion of people who have completed primary education is 51%, 23% of people have completed secondary education, while university education is less than 1%. Generally, the number of people in these communes who can speak and read Khmer is 100%.

19. **Occupation and incomes:** The primary source of family income in these two communes are agriculture (mainly rice), fishing and livestock, most commonly pig, and chicken, followed by hired labor (agriculture and construction worker). Only a few villagers have other sources of income such as repairers, employment in government offices or work.

20. **Land Use**: The total land area of the four villages is 1,027 hectares of which 95% is arable land but 15% percent is irrigated.

21. **Poverty**: The proportion of households in the medium/better off income categories is 34% and the proportion of ID Poor 1 and 2 is 5 and 27% respectively.

³ See Annex 3 for the certification of the RoW of the road issued by the district Department of Land Management, Urban Planning and Cadastral.

⁴ See Annex 1 for a summary of the socio-economic status of the five target villages.

22. **Migration:** By mid-2021 over 200,000 of migrant workers has returned to Cambodia from migrant countries since the beginning of the CoVID-19 pandemic.⁵ The baseline survey that was conducted in 23 villages in TKM province showed that 8.3% of the households had been impacted by the loss of income from returning migrants who had lost their employment.

23. **Gender and Decision making:** Although Cambodian society is not a matriarchal society the women in rural households play a critical role in decision making particularly in relation to the family finances. They are actively engaged in the production of agricultural products but tend to specialist in activities such as small-scale backyard livestock production as well as basic processing of the products before sale. They also play a key role in the sale and marketing of products in local markets. They are well empowered in the decision-making processes within the household particularly relating to expenditure.

5. ENVIRONMENTAL AND SOCIAL IMPACTS AND MITIGATION MEASURES

5.1 Public consultation meetings

24. There have been two public consultation meetings conducted for this subproject. The 1st public consultation meeting was conducted on 15th June 2023 in the Pagoda in Dar commune with representatives of the local authorities to seek their agreement to the proposed design for the construction of the proposed DBST road.

25. The 2nd public consultation meeting was conducted on 22nd June 2023 at the same locations with the local authority, representative from environmental institutions as well as local residents who are living along the roadside to provide more detailed information on the design of the proposed DBST road and to describe the identified impacts as well as the Grievance Redress Mechanism (GRM) and the Project Information Booklet (PIB) was also distributed to all participants.⁶ The discussions with likely PAPs included the possible need for the construction of side drains in some sections and the requirement that residents who wish to construct a ramp access from their property to the road must purchase concrete culverts to ensure there is no obstruction of the road drainage.

5.2 Rapid Environmental and Social Screening Assessment

26. A Rapid Environment and Social Screening Assessment and Environmental and Social Impact Analysis have been completed for the subproject.⁷ The screening checklist has confirmed a limited number of impacts will arise as a result of the civil work. The most important of these are (i) localized dust from clearing grass and removing soil from the proposed road line; (ii) noise from hauling of the construction materials during construction; (iii) health and safety risks for construction workers when using construction materials; and (iv) public health and safety including managing risk and prevention of CoVID-19 during construction; (v) generation of solid waste, such as used containers and waste from workers; and (vi) traffic congestion during civil works constructions.

27. These impacts are all considered minor because of the relatively small scope of the civil work and the short-term duration of the construction. The road is located in an area of low population density, and it is not directly adjacent to housing and sensitive receptors such as health centers, pagodas, commune offices, mosques, markets and schools. The minor impacts can be adequately managed through the application of good construction practices and an effective Grievance Redress Mechanism (GRM).

28. An Environmental and Social Code of Practice (ESCoP)/EMP including the prevention of CoVID-19 spread, and Occupational Environmental Health and Safety Plan (OEHSP) has been developed to cover these impacts and to advise on the prevention of any unforeseen events. The ESCoP/EMP will be included in the bidding and contract documents for the subprojects/lots, to ensure the awarded contractor understands and be aware of the requirements before a bid is submitted.

29. The PMU/Environment and Social Management Unit (ESMU) together with Environmental and Social Specialists will undertake site visits to ensure compliance with the ESCoP and any complaints

⁵ Information Note #8: UN Cambodia's Support to Returning Migrant Workers in the COVID-19 Response (https://cambodia.un.org/en/132559-information-note-8-un-cambodias-support-returning-migrant-workers-covid-19-response).

⁶ See Annex 8 for the descriptions of the public consultation meetings, attendance list and photographs.

⁷ See Annex 4 for the RESA checklist and Annex 5 for the ESIA.

will be followed up and where necessary the GRM will be used to address Project related environmental or social issues.

30. As a result of the environmental and social screening assessment, the proposed subprojects are confirmed as environmental category B due to the minor impacts during the construction including the removal of 81 trees, but there are anticipated to be minimal adverse environmental impacts, and these can be mitigated during construction phase.

5.3 Climate Risk Screening

31. A Climate Screening Risk Assessment has been completed for all rural road subprojects. In Cambodia, seasonal variability in rainfall patterns is expected to increase, resulting in more intense rainfall during the wet season and extended droughts during the dry season. These trends apply to all subproject sites. Given the timescale for significant climate change, it will not have any significant impact on the subprojects, but it is recommended that all construction should commence before the onset of the rainy season.

32. This subproject has been screened for potential climate risk.⁸ The only risks foreseen are the risk of increased flash flooding that may occur as a result of increased and higher intensity rainfall during the wet season. This has been addressed in the DED by the elevation of road in any low lying sections as well as the installation of proper drainage, including the replacement of all pipe culverts to ensure that the impact of any such flooding events is minimized.

5.4 Description of social characteristics of subproject site

33. The road sections that are included under this subproject for upgrading to DBST road are predominantly located within rural areas. There is one section of the road (PK1+150 to PK1+800) and PK 5+900 to 6+250) that pass through more populated residential area and the proposed road basewidth within these areas is between 10.0 and 12.0 meters and is not elevated so there will be no impact on these existing structures.

5.5 Land acquisition and resettlement screening

34. The construction of the road will not require the acquisition of any private land since the civil work will be conducted entirely within the official RoW of the road and there will be no requirement for the preparation of a Resettlement Plan (RP).⁹ There will be some minor temporary impacts during the construction period on land that is within the Col, and although no trees will need to be removed there are a few overhanging roofs and fences that have been erected/installed within the official RoW.

5.6 Identification of Affected Persons

35. Based on the census conducted during the preparation of the subproject DED there are six APs identified who will be impacted through the loss roofs and fences for the civil works, but they have voluntarily agreed to their removal.¹⁰

5.7 Identification of vulnerable households

36. There are no vulnerable households impacted by the removal of the roofs and fences.

5.8 Indigenous Peoples

37. The commune authorities have confirmed that there are no indigenous peoples residing within either of these communes.

5.9 Environmental and Social Categorization

38. This subproject has been placed under Category B for environmental and social impacts. There will be minor temporary environmental impacts during the civil work, there is no land acquisition and social impacts are restricted to the removal of 81 trees and the relocation of some fences and dismantling of some overhanging roofs along the roadside. Therefore, the Project ESCoP/EMP will be applied.¹¹ This document describes the mitigation procedures for all perceived potential impacts of the DBST and RC road construction and will be appended to the contract that is awarded and must be

⁸ See Annex 6 for Preliminary Climate Risk Screening Checklist

⁹ See Annex 7 for the Land Acquisition and Resettlement Screening checklist.

¹⁰ See Annex 9 for the Certificates of Land/Asset Transfer (CLFTs) for the 41 APs and Annex 10 for the IoL table. . ¹¹ See Annex 12 for the Environmental and Social Code of Practice and Annex 13 for Environmental and Social Monitoring Plan.

adhered to by the contractor. The contractor will be required to prepare a Contractor's Environmental and Social Management Plan (CESMP) and submit monthly reports to the PIU on the level of compliance.

6. GRIEVANCE REDRESS MECHANISM

39. The Project has developed a GRM so that any from the residents can be promptly resolved, using an understandable process that is culturally appropriate and readily accessible at no cost to all PAPs as well as workers employed by the contractor for the civil work construction. A grievance can be submitted if any PAP(s) believe(s) the subproject is having a detrimental impact on them as a result of land acquisition impacts. For the interests of all parties concerned, the GRM is designed with the objective of solving disputes in the shortest time possible. There are four steps within the GRM corresponding to commune/village, district, provincial and national levels. The GRM is explained to the local authorities and community members during the public consultation meetings and is included in the PIB for each subproject including the contact details for each level.

- 40. The steps described are summarized below:
 - a) Level 1. The first level of complain resolution, following the traditional methods in Cambodia, involved problem solving at the village/commune level at which a solution can be sought amicably on the spot without the need for lodging a formal complaint. An AP will present their complaints and grievances verbally or in writing to the village chief and/or commune chief. The receiving agent will be obliged to provide immediate written confirmation of receiving the complaint. If after 15 days the aggrieved PAP does not hear from the village and commune chief or if he/she is not satisfied with the decision taken in the first stage, the complaint may be brought to the District Governor's Office.
 - b) Level 2: In cases where grievances cannot be resolved through problem solving at the commune/village level, complaints/grievances can be filed with the District Governor's office at the second level. The District Governor's Office will record the grievance and off a solution within 15 days to resolve the complaint to the satisfaction of all concerned. If the complaint cannot be solved at this stage, the District Office will bring the case to the Provincial Resettlement Sub-Committee (PRSC).
 - c) Level 3: The PRSC meets with the aggrieved party and tries to resolve the situation. The Committee may ask for a review of the DMS by the provincial Department of Land Management, Urban Planning, Construction and Cadastral (DLMUPCC). Within 30 days of the submission of the grievance, the PRSC must make a written decision and submit copies to the MRD/PMU and the AP(s).
 - d) Level 4: If the aggrieved PAP does not hear from the PRSC or is not satisfied, s/he can bring the case to Provincial Court. This is the final stage for adjudicating complaints. The Court will make a written decision and submit copies to the MRD/PMU, PDRD and the PAP(s). If any party is still unsatisfied with the Provincial Court judgment, he or she can bring the case to a higherlevel court.

41. The PRSC comprises of representatives from the relevant provincial authorities and MEF as follows:

- Chair: Provincial Governor, or person appointed by the Provincial Governor
- Vice Chair: Director of Provincial Department of Rural Development
- Member: Director of Provincial Department of MEF
- Member: Chief of Provincial Office of Law and Public Security
- Member: District Governor
- Member: Commune councillors
- Member: One Representative of Local Based Civil Society Organization

42. There are no fees or charges levied on the PAP for the lodgment and processing of the complaints under the 1st to 3rd levels. However, as provided for in the Expropriation Law, the aggrieved PAP can file a lawsuit at the Provincial/Municipal Courts, as applicable, to seek a resolution. Such actions will be at the cost of the PAP. At this stage, there is no involvement of the General Department of Resettlement (GDR) or IRC-WG unless there is a judicial order from the competent courts.

7. ANALYSIS OF ALTERNATIVES

7.1 Summary of all mitigation actions

43. Following the DED as well as the Col that was agreed to during the public consultations and the demarcation, it has been found that the proposed DBST road will have some minor temporary impacts to a small strip of land on each side of the road during the construction that is within the official RoW and will also require the removal of 26 trees for the road construction. The confirmed findings for this rural road subproject are as follows:

- a. Meaningful public consultation meetings have been completed with the local authorities from Dar, Teuk Chrov and Ponhea Kraek communes and with the residents from the four villages along the road line.
- b. No residential or privately owned land is affected by the subproject.
- c. There are no landless households that will be adversely affected by the subproject.
- d. The RoW for the road is 30.0 metres as confirmed by the Governor of Memot district as well as District Office/Provincial Department of Land Management, Urban Planning, Construction and Cadastre
- e. The DBST and RC road construction will be performed completely within the RoW of the road. There will be temporary use of one meter of land on each side of the road beyond the proposed road basewidth for the movement of equipment and materials during the construction, that lies within the agreed Col, but this is also within the RoW of the road and no impact was foreseen during the subproject site screening.
- f. The contractor will not use any other land outside of the agreed Col.
- g. The construction will require the removal of some shrubs and vegetation that are growing along the roadside all of which are within the RoW of the road as well as some overhanging roofs and fences and the six APs who claimed ownership of these assets have agreed voluntarily to their removal.
- h. All residents of the four villages will benefit directly from the proposed upgrading.
- i. There were no impacts identified on vulnerable households and ID Poor households.
- j. There has been no coercion of any households by the design team, and this has been verified by the village leaders.

44. During the field visits and the public consultations, it was confirmed by the local authorities and consulted people that there are no IPs residing in these two communes. The subproject has been classified as category B for environmental and social safeguards based on the AIIB classification and the approved ESMPF, RPF and IPPF.

45. The GRM has been established as described above and it has been explained to the beneficiaries/likely affected person/household who participated during the public consultations. In addition, the Project Information Booklet (PIB) which includes the GRM information and its steps, was also distributed to local authorities and all participants. A GRM logbook has been prepared and is available at each commune office for complaint registry and responses if any potential problems may occur during the construction.

7.2 Comparison with no subproject scenario

46. The existing laterite road is dilapidated and has been poorly maintained so that during the wet season it renders travel difficult, and this impedes the ability of the local residents to travel from their village to the commune centers as well as to the national road No. 5 and in accessing services such as schools, markets and health facilities. It also creates difficulties for the households who wish to transport agriculture products to the local markets as well as to the national roads that connect them to markets in district centers and the provincial town. It also impedes the activities of buyers/traders who travel to these villages to purchase products from the farming households. If there is no action taken to upgrade the road it will continue to deteriorate especially in the lower lying areas where the high rainfall during the wet season can create temporary flash flooding that in turn exacerbates the road condition. The increasing traffic volumes including the use of the road by heavier vehicles also results in more damage to the road with the creation of rutting. During the dry season the road will continue to be difficult to drive on due to the rutting and the dust created by passing vehicles will have increasingly serious impacts on the respiratory health and lives of households residing along the roadside. The construction of the DBST road with appropriate climate risk reduction measures along sections of the road that are low-lying will result in a road that is durable and with good maintenance it will bring lasting benefits to the local residents.

7.3 Discussion of benefits to local community to offset against impacts

47. During the public consultation meetings, the residents have been provided with a clear explanation of the scope of the civil work and the possible temporary impacts that may occur during the construction period. They have agreed that these minor and temporary impacts are of little concern to them if the road can be upgraded since it will bring good benefits to them through ease of travel and transport of goods. They are all aware of the GRM that has been established and the mechanism through which they can voice their complaints if there any other unexpected impacts on their land or assets or from the civil work.

8. CONCLUSIONS AND RECOMMENDATIONS

48. Internal monitoring must be performed regularly during the implementation of the subproject, mainly during the construction period. This monitoring will be performed by the PIU supported by the Supervision Engineers and Safeguards Specialist, who are a part of the Construction Supervision Consultant Team for Rural Roads (SP2). The progress of the civil work will be reported in the Project Quarterly Progress Reports and the annual Safeguards Monitoring Reports that will be prepared by the PMU team. In addition, the annual safeguards monitoring report will include the result of the additional public consultation meeting that will be carried out immediately prior to commencement of the civil work.

49. Measures must be taken to avoid disruption of villagers' daily lives. The villagers must be informed in advance when works at specific locations are planned and whether some services or access will be temporarily affected. If any damage to private properties occurs during the construction period, the assets replacement-based compensation will be paid as per the national laws and regulations and AIIB ESP and the project ESMPF. The contractor must support the GRM process and ensure timely and effective resolution of grievances.

50. The awarded contractor will be responsible for reinstating the land used to access the subproject site during construction to the original condition and SP2 team will monitor the progress and report through safeguard monitoring reports. The SP2 team must ensure that private land, temporarily used for access to the sites, is properly restored and returned to the owner without any unnecessary delays. The PIU should closely monitor the construction process and shall ensure that if any impact is caused by contractor during the civil work, this is reinstated by contractor strictly in line with the entitlement matrix in the approved Project RPF at the full replacement cost. The PIU are responsible for updating the status of safeguard compliance in the semi-annual safeguard monitoring reports and will include all the relevant supporting documents (i.e., receipt of payments of any compensation made by contractor, full consultations conducted etc.,).

51. The PIU should ensure that the subproject does not adversely impact any household during the civil work and will require the contractor to provide alternative access to water in case of temporary blockage of canals during construction as needed; and ensure access to their rice fields and houses are provided at all times including as temporary alternative measures in consultation with farmers and households who are living nearby.

Annex	1:	Socio-economic	data
-------	----	----------------	------

Villages	Popn.		Male	I	Female	N	o. of HH	Ave HH size	No. of vulnerable HH	Khmer		
Memae	2691		1307		1384		751	4	1%	23%		
Srae Choam	884		434		450	216		4	34%	0%		
Meaek Puk	711		263		448		170	4	42%	0%		
Spean	1787		369		1418		472	4	9%	0%		
Marital status (%)	Couples	5	Widows	W	idowers							
Memae	91%		9%		1%							
Srae Choam	81%		13%		6%							
Meaek Puk	95%		5%		1%							
Spean	94%		4%		2%							
Education (%)	Illiterat	e	Literat	e	Prim	ary	Seco	ondary	High	University		
Memae	10%		90%		559	%	2	5%	10%	0.00%		
Srae Choam	15%		85%		469	%	2	2%	16%	1.00%		
Meaek Puk	15%		85%		509	%	2	0%	14%	1.00%		
Spean	10%		90%		539	%	2	5%	10%	2%		
Occupation (%)	Farmin	g	Employ	ees	Busi	nes	2	ublic ector	Health	Fishing		
Memae	87%		8%		49	6		1%	1.00%	0%		
Srae Choam	93%		0%		6%			1%	1%	0%		
Meaek Puk	89%		2%		6%	6		2%	0%	0%		
Spean	90%		0.42%	, D	6.78	3%	2.	54%	0.21%	0%		
Domestic Migration	% of pop	on.	% of m	en	% wom					% of popn.		
Memae	8.44%		4.20%	, D	4.24					1.41%		
Srae Choam	3.85%		2.38%		1.47		- %	external m	igration	0.45%		
Meaek Puk	1.55%		1.13%		0.42					0.42%		
Spean	6.55%		3.81%		2.74					0.39%		
				-			d classifi	cation (ha)				
Land use (ha)	Total area	Res	idential	C	ommon		rigated	Rainfed	Crops	Community forest		
Memae	900.00	1:	50.00		0		0	150.00	600.00	0		
Srae Choam	1,235.82	1	7.94		0		0	154.33	1,063.55	0		
Meaek Puk	677.25		9.09		0		0	80.76	587.40	0		
Spean	1,296.33	4	1.35		0		0	249.91	1,005.07	0		
Agriculture activities	Population	N	o. of HHs		Farming production (%)		Farming without pesticide	(ton/ha	E Farm	gate price (riel)		
Memae	2691		751		90%		0%	2.5 tons	;	800 Riels		
Srae Choam	884		216		70%		0%	3 tons		1000 Riels		
Meaek Puk	711	1	170		70%		0%	3 tons		1000 Riels		
Spean	1787		472		75%		0%	3 tons		000 Riels		
Water/Sanitation (%)	Potable water	Boi	led/filtere water	d	Latrine)		latrine				
Memae	0%		100%		52%			48%				
Srae Choam	0%		100%		46%			54%	_			
Meaek Puk	0%		100%		40%			59%				
								<u>39%</u> 41%				
Spean	0%		100%		59%				_			
Poverty levels (%)	Very poor		Poor		Mediun	1	Ве	tter off				
Memae	3%		16%		77%			4%				
Srae Choam	9%		35%		50%			6%				
Meaek Puk	5%		36%		53%			5%				
Spean	1%	1	21%		70%			8%				

				U		-	nal land re			Othor	r land for											
		Width of		Base-width of road		Auditio	wide	•	n Toau		r land for orary use	Tree										
Village(s)/ Commune	PK Number	PK Number	PK Number	PK Number	PK Number	PK Number	PK Number	PK Number	PK Number	PK Number	official ROW	Length (m)	(m)		Т	otal	Outside	e ROW		construction		
Commune		(m)	(11)	Existing	Proposed	Width (m)	Area (m ²)	Width (m)	Area (m ²)	Width (m)	Area (m ²)	N	Type of Structure									
Section Mem	ae to Meaek Puk	1		1		(,	()	(,	(111)	()	(11)	L										
	PK 0+000 - 0+100		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 0+100 - 0+200		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
Memae /	PK 0+200 - 0+300		100.0	5.0	12.0	7.0	700.0	-	-	2.0	200.0	0										
Kraek	PK 0+300 - 0+400 PK 0+400 - 0+500		100.0 100.0	5.0 5.0	13.0 12.0	8.0 7.0	800.0 700.0	-	-	2.0 2.0	200.0 200.0	0										
	PK 0+400 - 0+500 PK 0+500 - 0+600		100.0	5.0	12.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 0+600 - 0+700		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 0+700 - 0+800		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 0+800 - 0+900		100.0	5.0	12.0	7.0	700.0	-	-	2.0	200.0	0										
	PK 0+900 - 1+000		100.0	5.0	12.0	7.0	700.0	-	-	2.0	200.0	0										
	PK 1+000 - 1+100		100.0	5.0	14.0	9.0	900.0	-	-	2.0	200.0	0										
	PK 1+100 - 1+200		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0	Stone Fence, Extended zinc roof									
	PK 1+200 - 1+300		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 1+300 - 1+400		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 1+400 - 1+500		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0	Wire fence									
	PK 1+500 - 1+600 PK 1+600 - 1+700		100.0	5.0 5.0	10.0 10.0	5.0 5.0	500.0 500.0	-	-	2.0 2.0	200.0 200.0	0										
	PK 1+700 - 1+800		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 1+800 - 1+900		100.0	5.0	10.0	5.0	500.0			2.0	200.0	0	Extended zinc roof									
								-	-			-	Extended zinc 100									
rae Choam / Dar	PK 1+900 - 2+000 PK 2+000 - 2+100		100.0	5.0 5.0	10.0 10.0	5.0 5.0	500.0 500.0	-	-	2.0 2.0	200.0 200.0	0										
/ Dai	PK 2+000 - 2+100 PK 2+100 - 2+200		100.0	5.0	9.0	5.0 4.0	400.0	-	-	2.0	200.0	0										
	PK 2+200 - 2+300		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 2+300 - 2+400		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 2+400 - 2+500		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 2+500 - 2+600		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 2+600 - 2+700		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 2+700 - 2+800		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 2+800 - 2+900 PK 2+900 - 3+000		100.0	5.0 5.0	10.0 10.0	5.0 5.0	500.0 500.0	-	-	2.0 2.0	200.0 200.0	0										
	PK 3+000 - 3+000		100.0	5.0	13.0	8.0	800.0	-	-	2.0	200.0	0										
	PK 3+100 - 3+200		100.0	5.0	18.0	13.0	1,300.0	-	-	2.0	200.0	0										
	PK 3+200 - 3+300		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 3+300 - 3+400		100.0	5.0	12.0	7.0	700.0	-	-	2.0	200.0	0										
	PK 3+400 - 3+500	30.0	100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 3+500 - 3+600		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 3+600 - 3+700 PK 3+700 - 3+800		100.0	5.0 5.0	10.0 11.0	5.0 6.0	500.0 600.0	-	-	2.0 2.0	200.0 200.0	0										
	PK 3+800 - 3+900		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 3+900 - 4+000		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 4+000 - 4+100		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 4+100 - 4+200		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 4+200 - 4+300		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 4+300 - 4+400		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 4+400 - 4+500 PK 4+500 - 4+600		100.0 100.0	5.0 5.0	10.0 10.0	5.0 5.0	500.0 500.0	-	-	2.0 2.0	200.0 200.0	0										
	PK 4+600 - 4+700		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 4+700 - 4+800		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 4+800 - 4+900		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 4+900 - 5+000		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 5+000 - 5+100		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
/leaek Puk /	PK 5+100 - 5+200 PK 5+200 - 5+300		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
Dar	PK 5+200 - 5+300 PK 5+300 - 5+400		100.0	5.0 5.0	11.0 11.0	6.0 6.0	600.0 600.0	-	-	2.0 2.0	200.0 200.0	0										
	PK 5+400 - 5+500		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 5+500 - 5+600	1	100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 5+600 - 5+700)))	100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 5+700 - 5+800		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 5+800 - 5+900		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	PK 5+900 - 6+000 PK 6+000 - 6+100		100.0 100.0	5.0 5.0	11.0 10.0	6.0 5.0	600.0 500.0	-	-	2.0 2.0	200.0 200.0	0	Stair, Extended zinc roof									
	PK 6+100 - 6+200		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 6+200 - 6+300		100.0	5.0	14.0	9.0	900.0	-	-	2.0	200.0	0										
	PK 6+300 - 6+400		100.0	5.0	12.0	7.0	700.0	-	-	2.0	200.0	0										
	PK 6+400 - 6+500		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0										
	PK 6+500 - 6+600		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0										
	1 12/ 6:600 6:700	1	100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0	1									
	PK 6+600 - 6+700		100.0	F 0	40.0	70	700.0			0.0	000.0	¢										
	PK 6+700 - 6+800 PK 6+800 - 6+900		100.0 100.0	5.0 5.0	12.0 11.0	7.0 6.0	700.0 600.0	-	-	2.0 2.0	200.0 200.0	0										

Annex 2: Existing and proposed road widths within Col

		Width of			Ith of road	Additio	nal land re wide		or road		land for brary use		Tree						
Village(s)/	PK Number	official	Length	(m)		Total		Outsid	le ROW		onstruction								
Commune		ROW	(m)			Width	Area	Width	Area	Width	Area								
		(m)		Existing	Proposed	(m)	(m ²)	(m)	(m ²)	(m)	(m ²)	Ν	Type of Structure						
lunction (Sra	e Choam to Spean)					. ,	. ,		,		. ,								
	PK 0+000 - 0+100		100.0	5.0	9.0	4.0	400.0	-	- 1	2.0	200.0	0							
	PK 0+100 - 0+200		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 0+200 - 0+300		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 0+300 - 0+400		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0							
	PK 0+400 - 0+500		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 0+500 - 0+600		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 0+600 - 0+700		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 0+700 - 0+800		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 0+800 - 0+900		100.0	5.0	12.0	7.0	700.0	-	-	2.0	200.0	0							
	PK 0+900 - 1+000		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 1+000 - 1+100		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
0	PK 1+100 - 1+200		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0							
Srae Choam / Dar	PK 1+200 - 1+300		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
/ Dai	PK 1+300 - 1+400		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 1+400 - 1+500		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0							
	PK 1+500 - 1+600		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 1+600 - 1+700		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0							
	PK 1+700 - 1+800		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0							
	PK 1+800 - 1+900		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 1+900 - 2+000		100.0	5.0	13.0	8.0	800.0	-	-	2.0	200.0	0							
	PK 2+000 - 2+100		100.0	5.0	14.0	9.0	900.0	-	-	2.0	200.0	0							
	PK 2+100 - 2+200	30.0	100.0	5.0	12.0	7.0	700.0	-	-	2.0	200.0	0							
	PK 2+200 - 2+300		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 2+300 - 2+400		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0							
	PK 2+400 - 2+500								100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0	
	PK 2+500 - 2+600		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 2+600 - 2+700		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 2+700 - 2+800		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 2+800 - 2+900		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 2+900 - 3+000		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0							
	PK 3+000 - 3+100		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 3+100 - 3+200		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 3+200 - 3+300		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
Spean / Dar	PK 3+300 - 3+400		100.0	5.0	11.0	6.0	600.0	-	-	2.0	200.0	0							
Spean / Dai	PK 3+400 - 3+500		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 3+500 - 3+600		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 3+600 - 3+700		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 3+700 - 3+800		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 3+800 - 3+900		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 3+900 - 4+000]	100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 4+000 - 4+100		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 4+100 - 4+200		100.0	5.0	10.0	5.0	500.0	-	-	2.0	200.0	0							
	PK 4+200 - 4+248		48.0	5.0	10.0	5.0	240.0	-	-	2.0	96.0	0							
										ength (m)	11,231.0								
То	tal land requirement				Addition	hal land a	area requi	red for ro	oad wide	ning (m²)	63,455.0	0.0							
.0			Ad	ditional la	nd area req	uired for	road wide	ning out	side of F	ROW (m ²)	0.0	0.0							
				Oth	ner land are	a for ten	porary us	e during	construc	tion (m ²)	22,462.0								

Annex 2: Existing and proposed road widths within Col (cont.,)

Annex 3: Certification of Right of Way

ព្រះពជាលោចក្រអង់ជា

ជាតិ សាសនា ព្រះមហាក្សត្រ



ช ธลุย เพื่อ เยามากล์ ยู่เสาะ ยกเลี้กา. พ ยิสอเป กูนนุ่. ชัย อีน เอ พียา ยู่ เยอก

សូទ៩ទ្រាំមដូន លោកអតិបាល នៃគណៈអតិបាលស្រុកពញាអ្រែក លោកអតិបាល នៃគណៈអតិបាលស្រុកទេចត់

អន្មទង្កុ៖ សំណើសុំការឯកភាពបញ្ជាក់លើការកំណត់ទំហំផ្លូវពីភូមិមេម៉ៃ ឃុំក្រែក ស្រុកពញាក្រែក ទៅភូមិមែកពុក ឃុំដារ ស្រុកមេមត់ ខេត្តត្បូងឃ្មុំ ដែលមានទំហំ ១៥ម៉ែត្រ សងខាងអ័ក្សផ្លូវ។

- ទេសាល ៖ ព្រះរាជក្រមលេខ នស/កេម/០៥១៤/០០៨ ចុះថ្ងៃទី៤ ខែឧសភា ឆ្នាំ២០១៤ ស្តីពីការ ប្រកាសឱ្យប្រើច្បាប់ស្តីពីផ្លូវថ្នល់នៃព្រះរាជាណាចក្រកម្ពុជា។
 - អនុក្រឹត្យលេខ១៩៧អនក្រ-បក ចុះថ្ងៃទី២៣ ខែវិច្ឆិកា ឆ្នាំ២០០៩ ស្តីពីការគ្រប់គ្រងចំណីតាម បណ្តោយផ្លូវជាតិ និងផ្លូវរថភ្លើង នៃព្រះរាជាណាចក្រកម្ពុជា។

សេចក្តីដូចមានចែងក្នុងកម្មវត្ត និងយោងខាងលើ ខ្ញុំសូមជម្រាបជូន សោះអះអ៊ោធារាលត្រូវខាងលើ ជ្រាបថា ដើម្បីឆ្លើយតបទៅនឹងតម្រូវការរបស់ថ្នាក់ជាតិក្នុងការអនុវត្តគម្រោងលើកកម្ពស់គុណភាពផ្លូវខាងលើ ឆ្លងកាត់ភូមិមេម៉ៃ ឃុំក្រែក ស្រុកពញាក្រែក ទៅភូមិមែកពុក ឃុំជាវ ស្រុកមេមត់ ខេត្តត្បូងឃ្មុំ។ មន្ទីវ អភិវន្ឍន៍ជនបទខេត្ត បានដាក់បញ្ចូលទៅក្នុងគម្រោងពង្រឹងសមត្ថភាព ផលិតភាពជនបទដើម្បីលើកកម្ពស់ គុណភាពផ្លូវ ដោយក្រាលកៅស៊ូពីរជាន់ ក្នុងន័យនេះ មន្ទីរសុំការឯកភាពកំណត់យកទំហំ ១៥ម៉ែត្រ សងខាងផ្លូវ សម្រាប់ទុកជាសម្បត្តិផ្លូវថ្នល់ក្នុងមូលដ្ឋានដើម្បីអភិវន្ឍន៍ជាហេដ្ឋារចនាសម្ព័ន្ធផ្លូវសាធារណៈ និងមិនមានការគ្រប់គ្រងដោយកម្មសិទ្ធប្រើប្រាស់ឯកជនណាមួយឡើយ។

អាស្រ័យដូចបានជម្រាបជូនខាងលើ សូម **ឈោអះអ៊ើបាលស្រុអ** ពិនិត្យ និងចូលរួម សហការ ឯកភាពលើការកំណត់ទំហំផ្លូវខាងលើសម្រាប់អនុវត្តន៍គម្រោងនៅក្នុងមូលដ្ឋាន ស្រុកពញាក្រែក និងស្រុកមេមត់ ដោយក្តីអនុគ្រោះ។



អាសយដ្ឋានៈ ក្នុងហិវេណសាលានេត្តត្បូងឃ្មុំ ភូមិនិគមលើ ឃុំស្រឡប់ ស្រុកត្បូងឃុំ ខេត្តត្បូងឃ្មុំ E-mail.mrd.tboungkhmum@gmail.com

Nation Religion King

Ministry of Rural Development Tboung Khmum Provincial Department of Rural Development No. 194/23 P.D.R.D.TKM

Tboung Khmum, August 28, 2023

- To: Governor of Ponhea Kraek District Governor of Memot District
- Subject: Request for confirmation/agreement of the Right of Way (ROW) for Rural Road from Memae village, Krek Commune, Ponhea Kraek District to Meaek Puk village, Dar commune, Memot district in Tboung Khmum province with a distance of 15m from the road centerline.
- Ref: Royal Decree No. N.S/R.K.M/0514/008 dated 04 June 2014 on promulgating the road law of the Kingdom of Cambodia. Sub-decree No. 197 ANK-BK dated 23 November 2009 on management of the Right of Way along the National Road and the Railway of the Kingdom of Cambodia.

As stated in the subject and reference above, I would like hereby to inform the Governor of District that in order to respond to the national level's requirements in the implementation of the said road improvement project to traverse cross Memae village, Krek commune in Ponhea Kraek district and Srae Choam, Spean and Meaek Puk villages of Dar commune in Memot district of Tboung Khmum province. The Provincial Department of Rural Development (PDRD) has included the National Restoration of Rural Productive Capacity Project (NRRPCP) to improve as double bituminous surface treatment (DBST) road. Therefore, the PDRD would like to request for confirmation/agreement to determine a distance of 15m of both sides from the road centerline for the road properties/assets in the local area to develop as public road infrastructure and has not been managed by any private ownership use.

As mentioned above, we are pleased the Governor of District to check and participate in the coordination of confirmation/agreement on the determination of the Right Of Way (ROW) of the said rural road above for the project implementation in the local area of Ponhea Kraek and Memot districts.

Please accept, the Governor, the assurances of my highest consideration.

Director of Tboung Khmum Provincial Department of Rural Development

Signed and Sealed

An Sina

Certified Number: 133/23 Seen and Agreed Memot, 29 August 2023 Governor of Ream Ro District Signed and Sealed

Sreng Ly

Certified Number: 176/23 Seen and Agreed Ponhea Kraek, 29 August 2023 Governor of Ponhea Kraek District Signed and Sealed

Ly Sophealin

Annex 4: Rapid Environmental and Social Assessment (RESA) Checklist

	Environmental Safeguards	Yes	No	Remarks
a.	Is the subproject area adjacent to or within any of the following environmentally sensitive areas? - Wetlands, Mangrove, Estuarine	-	V	The proposed road is located along an existing laterite road. It does not pass through any environmentally sensitive areas. It is a low-lying areas.
b.	Will the subproject cause impairment of historical/cultural areas; disfiguration of landscape or potential loss/damage to physical cultural resources?	-	\checkmark	There will be no such impacts.
c.	Will the subproject cause disturbance to precious ecology (e.g. sensitive or protected areas)?	-	\checkmark	There will be no such impacts.
d.	Will the subproject cause alteration of surface water hydrology of waterways, resulting in increased sediment in streams affected by increased soil erosion at the construction site?	-	~	No permanent waterways crossing the low-lying constructed of reinforced concrete roads.
e.	Will the subproject cause deterioration of surface water quality due to silt runoff and sanitary wastes from worker-based camps and chemicals used in construction?	-	\checkmark	There are no permanent waterways crossing the road and only two creeks with box culverts.
f.	Will the subproject cause increased air pollution due to the subproject construction and operation?	-	\checkmark	Temporary impacts during construction and only minor in nature.
g.	Will the subproject cause noise and vibration due to project construction or operation?	-	\checkmark	It is not anticipated to use this equipment
h.	Will the subproject have poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of communicable diseases (such as STI's and HIV/AIDS) from workers to local populations?	-	V	The contractor will be required to ensure that the worker's camp is kept clean and sanitary and there will be proper disposal of all domestic waste.
i.	Will the subproject create temporary breeding habitats for diseases such as those transmitted by mosquitoes and rodents?	-	V	The contractor will be required to ensure that the worker's camp is kept clean and sanitary and there will be proposer disposal of domestic waste.
j.	Will the subproject result in a large population influx during project construction and operation that causes increased burden on social infrastructure and services (such as water supply and sanitation systems)?	-	V	Not anticipated. The contractor will be required to recruit unskilled labor from surrounding communities and not import unskilled labor from other areas.
k.	Will the subproject risks and vulnerabilities relate to occupational health and safety due to physical, chemical, biological, and radiological hazards during project construction and operation?	-	\checkmark	None of these impacts are anticipated.
I.	Will the subproject risks relate to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during construction and operation?	-	V	The subproject will not require the use of explosives and there will be proper arrangements for the storage and spreading of bitumen materials.
m.	Will the subproject pose community safety risks due to both accidental and natural causes, especially where the structural elements or components of the project are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning?	-	V	The contractor will be required to ensure that appropriate signage and safety barriers are erected to prevent the risk of accidents.
n.	Will the subproject generate solid waste and/or hazardous waste?	-	\checkmark	There will be no hazardous waste generated and sold waste will be disposed of properly.

Environmental Safeguards	Yes	No	Remarks					
o. Will the subproject use any chemicals?	-	~	The subproject will require the use of bitumen that will be stored and handled appropriately.					
p. Will the subproject generate wastewater during construction or operation?	-	\checkmark	No wastewater will be generated by the subproject.					
q. Will the subproject risk of landmines/UXO?	-	\checkmark	No UXO materials have been reported in the area.					
r. Will the subproject risk of CoVID-19 pandemic and HIV/AIDS?	-	~	The contractor will be required to ensure that health protocols are applied and the workers have only formal interaction with residents.					
s. Will the subproject be located in a flooded area?	-	\checkmark	Not applicable					
t. Will the subproject have any adverse impact on the livelihoods of APs through the loss of land or other productive assets.	The road will be constructed within the existing alignment and will not require any additional land and will have only very minor impacts on some trees and fences that may need to be removed or relocated.							
If the answer to any of the questions in this section is YES, an								
Impact Assessment which includes an Environmental Manage								
an Environmental Monitoring Plan needs to be prepared and	In Environmental Monitoring Plan needs to be prepared and attached.							

	Summary of RESA										
Classification	Classification Description										
Category A	The proposed subproject is classified as category A since it is likely to have significant adverse environmental impacts that are irreversible, diverse, or unprecedented. These impacts may affect an area larger than the sites or facilities subject to physical works.										
Category B	The proposed subproject is classified as category B since it has potential adverse environmental impacts but are less adverse than those of category A projects. These impacts are site-specific, few if any of them are irreversible, and in most cases mitigation measures can be designed more readily than for category A projects.	\checkmark									
Category C	The proposed subproject is classified as category C since it has minimal or no adverse environmental impacts.										

Date: 15th June 2023

Responsible Officer Provincial Project Manager Signature<u>អាន ស៊ីណា</u> Mr. An Syna

	Problem	Severity		Comments & locations on map		
	Increased threats to endangered wild animals	Large impact		No endangered wild animals living in		
	known to live in the area	Medium impact		the area.		
		No/small impact				
	Damage to the fisheries resources or fisheries	Large impact		No impact on any freshwater bodies		
	stocks	Medium impact		or lakes.		
		No/small impact	N			
ts	Damage to the forest (especially in bio-	Large impact				
ac	diversity areas)	Medium impact		Not located in forested areas.		
đ		No/small impact	V			
	Long term damage to agricultural land	Large impact		No impost on agricultural log d		
ü		Medium impact		No impact on agricultural land.		
so		No/small impact				
g	Erosion caused by changes to alignment or	Large impact		No rick of increased areaion		
t al	size of streams	Medium impact	V	No risk of increased erosion.		
eu		No/small impact	N	Only remayal of some shrubs and		
Ē	Erosion caused by removing vegetation	Large impact Medium impact		Only removal of some shrubs and small trees along the roadside that		
ğ	LIUSION Caused by removing vegetation	No/small impact		are growing within the RoW.		
Σ		Large impact	N			
e	Flooding caused by subproject implementation	Medium impact		No risk of flooding.		
Ē	Though g caused by subproject implementation	No/small impact		No lisk of hooding.		
Long term environment and social impacts		Large impact	v			
g	Long term impact causing by dust, noise or	Medium impact		Only short term impact during the civ		
2	safety problems	No/small impact		work.		
		Large impact	,			
	Damage to the livelihood, living environment or	Medium impact		No IPs reside in the area.		
	customs of indigenous people.	No/small impact				
		Large impact				
	Other long-term problem (describe)	Medium impact		None		
		No/small impact				
	Damage will be caused by vehicles	Medium impact		Access roads will be properly maintained during the period of the		
	transporting materials to the site	No/small impact		civil work.		
	Dust problem during construction	Medium impact		Water will be sprayed during earth		
cts		No/small impact		works to avoid increased dust.		
al Impacts	Noise problem during construction	Medium impact		Heavy machinery used only during		
8	Noise problem during construction	No/small impact		daylight hours.		
Soci	Contamination of water resources during	Medium impact		Proper disposal of solid waste to		
	construction	No/small impact	\checkmark	avoid contamination of water resources.		
Short-term Environment and	Damage to home gardens and fruit trees	Medium impact		Construction within the existing		
me		No/small impact		alignment.		
iror	Short-term damage to agricultural land	Medium impact		No impact to agricultural land.		
ć		No/small impact				
Ē	Damage to domestic water supplies	Medium impact		No threat to domestic water supplies.		
t-ter	Bamaye to domestic water supplies	No/small impact	\checkmark	The threat to domestic water supplies.		
Jor	Other short-term problem (describe)	Medium impact		None		
		No/small impact				

Annex 5: Environment and Social Impact Analysis (ESIA)

The construction of the DBST and RC road will bring considerable benefits to the local community in terms of shorter travelling times and easier travel during the wet season. It will also have very favorable environmental benefits in terms of reducing the level of dust pollution.

During the civil works there will be opportunities for local employment generation that will target the vulnerable households including returned migrant workers.

	Screening Questions	Score	Remarks
Location and Design of	Is siting and/or routing of the subproject (or its components) likely to be affected by climate conditions including extreme weather-related events such as floods, droughts, storms, landslides?	0	Any lower lying road sections will be constructed reinforced concrete road to reduce the impact of any flooding that does occur during the wet season.
Project	Would the subproject design (e.g. the clearance for bridges) need to consider any hydro- meteorological parameters (e.g., sea-level, peak river flow, reliable water level, peak wind speed etc.)?	0	Not applicable
Materials and Maintenance	Would weather, current and likely future climate conditions (e.g. prevailing humidity level, temperature contrast between hot summer days and cold winter days, exposure to wind and humidity hydro-meteorological parameters likely affect the selection of subproject inputs over the life of subproject outputs (e.g. construction material)?	0	Not applicable
	Would weather, current and likely future climate conditions, and related extreme events likely affect the maintenance (scheduling and cost) of subproject output(s)?	0	Provision will be made for on-going maintenance of the road through the MRD.
Performance of subproject outputs	Would weather/climate conditions and related extreme events likely affect the performance of the subproject.	0	Not anticipated.

Annex 6: Preliminary Climate Risk Screening Checklist

Options for answers and corresponding score are provided below:

Response	Score
Not Likely	0
Likely	1
Very Likely	2

Responses when added that provide a score of zero (0) will be considered <u>low risk</u> subproject. If adding all responses will result to a score of 1–4 and that no score of 2 and 1 were given to any single response, the subproject will be assigned a <u>medium risk</u> category. A total score of 5 or more (which include providing a score of 1 in all responses) or a 2 in any single response will be categorized as <u>high-risk</u> subproject.

Result of Initial Screening: LOW

Other Comments:

Prepared by: Chhay Samnang

Position: Environment Specialist

aunter.

Signature:

Date: 15th June 2023

SEEN AND AGREED BY: Mr. An Syna

Position: PIU Manager

Signature<u> អាន ស៊ីណា</u>

Date: 22nd June 2023

Annex 7: Land acquisition and resettlement screening checklist

Probable Involuntary Resettlement Effects	Yes	No	Not Known	Remarks
Involuntary Acquisition of La	nd			
1. Will there be land acquisition?	-		-	The road upgrading will be performed within the official RoW and there will be no impacts on private land.
2. Is the site for land acquisition known?	-	-	-	No land acquisition is required.
 Is the ownership status and current usage of land to be acquired known? 	-	-	-	No land acquisition is required.
4. Will easement be utilized within an existing Right of Way (ROW)?	\checkmark	-	-	The easement will be entirely within the COI for the road which is within the official ROW.
5. Will there be loss of shelter and residential land due to land acquisition?	-	\checkmark	-	No impact on residential land or shelter.
6. Will there be loss of agricultural and other productive assets due to land acquisition?	-	\checkmark	-	No land acquisition is required.
7. Will there be losses of crops, trees, and fixed assets due to land acquisition?	\checkmark	-	-	No trees within the COI (and the ROW) will need to be removed. Some extended roofs and movable fences will be moved back to their available land.
8. Will there be loss of businesses or enterprises due to land acquisition?	-		-	No land acquisition is required.
9. Will there be loss of income sources and means of livelihoods due to land acquisition?	-	\checkmark	-	No land acquisition is required.
-	d use or	on acce	ess to legall	y designated parks and protected areas
 Will people lose access to natural resources, communal facilities and services? 	-	\checkmark	-	There will be no loss of access to natural resources
 If land use is changed, will it have an adverse impact on social and economic activities? 	-	\checkmark	-	There will be no changes in land use.
12. Will access to land and resources owned communally or by the state be restricted?	-		-	There will no loss of access to land and communally owned resources.
Information on Displaced Pers Any estimate of the likely number If yes, approximately how many	of persor	ns that w	ill be displac	ed by the Project? [x] No [] Yes
Are any of them poor, female-hea	ids of hou	iseholds,	or vulnerab	le to poverty risks? [x] No [] Yes
Are any displaced persons from in	ndigenous	s or ethni	ic minority g	roups? [x] No [] Yes

Environmental and Social Management Plan Memae - Meaek Puk DBST road subproject, TKM4 (WRR5 - Lot 1)

Subproject Category	Subproject Eligibility	Next Steps
A: 200 or more persons will experience major impacts defined as (i) being physically displaced from housing, or (ii) losing 10% or more of their productive or income generating assets	Not Eligible	Identify alternative subproject
B: Less than 200 persons will experience major impacts defined as (i) being physically displaced from housing, or (ii) losing 10% or more of their productive or income generating assets	Eligible	Prepare RP in accordance with the RF
C: No involuntary resettlement impacts.	Eligible	No RP required

Prepared by: SOK SOPHA

Position: Social specialist

Signature: Som

Date: 15th June 2023

SEEN AND AGREED BY: Mr. An Syna

Position: PIU Manager

Signature<u> អាន ស៊</u>ីណា

Date: 22nd June 2023

Annex 8: Public consultation meetings

1 st public consultation meeting
(Local authorities and Social and Environmental team of SP1) Date: 15 June 2023 No of participants: 14 No of women: 2 Facilitator: Mr. Sok Sopha, Social Specialist (SP1) Mr. Chhay Samnang, Environmental Specialist (SP1).
Summary of discussions
Understanding and accepting the subproject:
- The social and environmental team of SP1 provided a description of the proposed DBST and RC road in Dar and Krek communes with a total length of 11,236 meters (11.236 Km) and with a carriageway width of 6.0 meters and shoulders of one meter on each side making a total width of 8.0 meters.
 The local authorities agreed with the proposal to construct the DBST and RC road since this will being benefits to the local residents in travelling to the provincial town and between the villages for going to school and local markets and transporting agricultural products.
 They fully supported the proposal to construct the DBST and RC road based on the proposed technical design. The access road from the area that will used to take soil or laterite to construct rural road was identified and agreed by local authorities and project beneficiaries.
 It was agreed that the cut-off date would be 15 June 2023 and the local authorities committed to inform the local residents who are using the land along the roadside that they should not establish any new crops, plant trees or install any fixed structures within the agreed Corridor of Impact after that date until such time as the civil work was completed.
Impact on individual land:
 The local authority verified and confirmed that the proposed DBST and RC road is located along the existing laterite road that has an existing base width of 8.0 meters and the new road will have a width ranging from 6.0 to 18.0 meters (carriageway & shoulder and box culvert locations). The construction of the DBST and RC road will not require any land acquisition along the sides of the road and the official RoW was confirmed as 30 meters.
 It was agreed that the Corridor of Impact will include an additional width of one meter on each side of the base width of the road and this land would be used temporarily during the construction period for the movement of equipment and materials.
Subproject management proposed by beneficiaries
 The local authorities proposed to form with a management committee to support the road operations and maintenance based on the guidelines of the MRD.

1st public consultation meeting - Photos





1st public consultation meeting - Participant list

	(1		លមាយ (ប៉ះកណ្ដា លមាយ (ប៉ះកណ្ដា ព្រះកណ្ដាល		AIB #	AM USPRASTRUCTURE ESTMENT BANK	
				<mark>ស្ទះ សួកចូលទ្រ/List of</mark> /ការប្រជុំជាសាធាលោ	participants	rSin		
				rientation/public meeting	1		1	
រីកនៃង	Nenue w		nan ng o	renazion/public meeting (n Saleguards i	កាលបរិផ្ដេ	i₽/Date	
1.0	នាម គៅត្តនាម	វភិទ	អាយុ	ត្វនាទី	ហត្ថលេខា (ទ		លេខទូរសព្ទ	ស្ថាប័ន/ភូមិឃុំ
(No)	(Name)	(Sex)		(Position)	ព្រឹក	ល្ងាច	Phone number	Institution/vellage/comm
1	17 225	TP	63	62026	MI	-	097823363	28275
2	PGT STO	J	48	Detter +	78	(11553432	Pr
3	ESS SET	U	55	THINGARD	m		0719992111	ßŦ
U	6212 63	U	FO.	Par & Dagal	TEr.		DAYEDEGAA	SIL
5	ACAG STO	V	38	ALANDO.	topens.		058112266	3 215
6	enzianto	ES.	42.	DIH TANTA	a song		0977799945	En.
7	ace his	N	1.3	R.L. TRADA	Da.		0977627486	UN MIC
8	13 2719	75	82.	- ALAST	Hehr		08590030	1 23
3	ara califa	U	59	and the start and	C655		071728604	6 AD5
10	active article	10	38	CENTER AD.C.	Sat		1977999748	50.50
11	20 mayo	81	65	CARA PARTICON	1100		5(1567)+23	the of
19	AND ANS	55	17	and a stand	6		09241252223	est (
12	1 Same way	0	65	and and	-at		0382089166	D //
13	En: Did	N	43	MARTIN	Añ		0922102090	64278
1U	885. NOVS	N	43.	ASST.	Her	-	0975755033	60,00

Total pax:

Female pax:

2 nd public consultation meeting
The meeting were carried out in Rung and Chan Mul commune Date: 22 June 2023 No of participants: 48 No of women: 12 Meeting chairman: Mr. Khem Rado, PIU Representative Facilitator: Mr. Sok Sopha, Social Specialist (SP1) Mr. Chhay Samnang, Environmental Specialist (SP1).
Summary of discussions
 Understanding and accepting the subproject: Mr. Khem Rado, representative of PDRD, Tboung Khmum provided background information and technical aspect on the selected road by upgrading from laterite to DBST, which this road is located in Dar and Krek communes. He also explained that this road upgrade is financed by AIIB as a loan to the Government of the Kingdom of Cambodia and MRD is the Executing Agency (EA), while the PDRD is the Project Implementation Unit (PIU). The local authorities and subproject beneficiaries understood clearly the proposed technical design of the proposed of DBST road subproject with 11,236 meters (11.236 Km) with the design width that ranges from 8.0 meters to 18.0 meters. All participants had shown their supports and provided their no objection to this road rehabilitation and agreed that the subproject will provide benefits to them for travelling to school, going from rice farming to home and bringing rice production from field to home or to the market and connecting to main road, which will bring more agricultural traders/buyers come to their villages/communes to buy their agricultural products (mostly paddy rice) at a higher price.
 The Project Information Booklet (PIB) was circulated to all participants and there was an explanation of the GRM and the contact persons.
 Impact on individual land: The local authority and the Project beneficiaries all confirmed that the proposed location for the subproject is correct and it is located within the alignment of the road with 8.0 to 18.0 meters base-width and aside from one short section this is greater than the existing 8.0 meters base-width. They confirmed that the road construction will not require any land acquisition on either side of the road and the villagers who are using the land along the existing road agreed that the DBST road will be constructed within the road Right of Way (RoW) so there will be no impact to any private property, but some small trees and shrubs may need to be removed. The participants insisted to have this road rehabilitated as soon as possible since the road now is in a very bad conditions which is dusty in the dry season and very slippery during the rainy season making it's hard to travel the entire year. The sooner the road is improved the public utilities such electricity, water supply and mobile phone/internet connection will also automatically connect to these villages making villagers can access to those utilities and maximize their access to agricultural market.
 Field validation: The local authorities, project beneficiaries and likely affected people were well informed about the process of the Inventory of Loss and the donation of the affected assets such as trees, fences, extended roofs/awning. There will be one-on-one consultation and the measurement of each and every likely affected assets and voluntary donations will be obtained in the form of written agreement. The local authorities together with the Project beneficiaries inspected the site for the DBST road and reconfirmed that it is located within the existing road alignment and there will no adverse impact or any negative impacts on the environment, livelihood and restriction to access to their properties. They fully aware that there will be some minor temporary impacts or disruption to the use of their land within the RoW during the construction but there will be no land acquisition required. The public consultations also discuss with the local authorities and reminded the villagers about the cut-off date that had been set during the 1st public consultation meeting on 16 June 2023 and that no new crops should be planted or other assets built within the Col prior to the commencement of the civil work. All villagers have confirmed and giving their consent by raising their hand to this during the consultation meetings. No indigenous and ethnic minority people residing in the villages and communes or even nearby these villages. This is confirmed that the existing laterite road is in poor condition and is difficult to travel during the wet season and creates a lot of dust during the dry season which adversely affects their respiratory health. They agreed that there may be some minor temporary impacts during the construction but they expected to have the improved road.

Regulations for the subproject

- Based on the discussion during the meeting, the local authorities and project beneficiaries agreed that they expected the MRD to ensure that there was a continuing maintenance program for the road to ensure that it remains in good condition for long term use.
- At the end of the consultation meeting (the same day), the local authorities and Project beneficiaries agreed with the identified subproject and they wished to use the proposed road as soon as possible.
- Since there will have been a long interval between the 1st public consultation meeting and the award of the contract it was proposed that there will be a further public consultation meeting conducted with the beneficiaries prior to the start of the civil work to ensure that there is a clear understanding of the GRM.

-

		រកមួបជុំ រល	ារព្រំរាម ខេត្តពាល Training	រផ្ទះ សូកចុងទេសបានដា កម្មរ សូកចុងស្រ/List of stenation/public meeting	I participants 1: 10g of	ISW T/	aan ampaatistati takki Kartandayt baank			(กญายาย การ	n	20.00	ថិះ អ័មជំណាំកាល បទសនា ដែះខេត្ត ប្រសាល ដែះខេត្ត	បត្រក្រ		ian nafrastru(ture Retuent Kann	
តន្លែង ល.រ	Venue TENE	150	ющ	ត្តនាទី	ហត្ថលេខា (g9/Date ແນຮອູເសດ	ស្ថាប័ន/ភូមិឃុំ			នមួលណ្ដាះ ក្	สายสาย	មកមាល់ទទំពាល ការ ខេត្ត មកមាល់ទទំពាល ការ ខេត្ត ក្នុង អ៊ីមស៊ីស៊េស៊ីស៊ីស៊ីស៊ីស៊ីស៊ីស៊ីស៊ីស៊ីស៊ីស៊ីស៊ីស៊ីស	er Satequarda	PP Sy		
No)	នាម គោត្តនាម (Name)	1000	(Age)	(Position)	ព្រីក	ចក្រ	Phone number	Path Annulage comm	9niga	Venue ogie et i E					កាលបរិត្	9/Date	
/	1 10		63		0		807H24 23733	Statuti	1.U2	នាម នោត្តនាម	171.9		ត្តនាទី	ហត្ថលេខា (ន		លេខទូសេព្	ស្ថាប័ន/ភូមិឃុំ
0	The and	21	62	ad and			0331252223	Eller.	(No)	(Name)		(Age)	(Position)	ត្រីក	ស្លាប	Phone number	Dage Auroldagecomm
2	and the	20	29	and the			1 Jaysache 1			span: ANN.			MARTIN	them.		097.2162094	50. RAIL
1	XALL DUALS	61	81	u						A. mr.		58		Gr-			44-
-	age ways		\$3						3	A. SA		58.		-1100			-4-
6	A LJ		46						+	75. NS 51 95.		57		An			-11-
	Bar and	N	56						5	AR. MALO	2	67 48		Aus			-1/-
0	Y 2 7 3	2/	36						2	UN. GUS.		40		1RD			- 11
9	inder our	d	61					4	-	01 12/5.	-	7-		1 m			
o	51 156	a	53					K				-					
1	wie St	81	61					×									
11	608 60	=	51	~				~									
13	Res Res	=1	42					4				_					
10	990 0000	21	53														
15	Die Sid	N	60					,				-					
16	5/4 232	23	32					×				-					
X	STa Stern	er	43									-					
10	65% ST	N	35					*									
19	62.2.2.2	Bar	36					*									
1	Su. S	ap	41					ĸ				_					
0	2000	TFUP	92					~				-					
1.5	En or cullo	DV.	61									-	_				
14	the phile	EC.	60					K				-					
5	life and	10	81	-r				×									
6	X	as	39	~~				×									
7	The the	63	40	-t				4									
18	S S	R	5.3														
			49														

2nd Public consultation meeting - participant lists

	(คุณ) อาวัตถุยอาการ		C18 8	ពដាសាចគ្រក ១សនា ព្រះធថ		AIIB #	AN INFRATTOCTURE			(ទីស្លារ ស្រសូខមាមខណ្ឌទំព័រ	UQ	C78 6	ពជាសាចគ្រកទ្ ភសនា ព្រះមហ	All	ABIAN DUPASTRUCTURE	
		ំព្របគ្រូច	ះពេទ្យិនាយ នាពទ្ធនាយ	ញ្ចុះ អ្នកផ្សារមួយក្រាន ការប្រេដុំដាសាទានេ rientation/public meeting	f participants n: cong a	Swi			Frigt	Wenue MOMS	្រ ស្រាមផ្លូង.	មេណ្ដាល Training/or	ស្មះ អូកព្ទះបង្រេ/List of ការប្រេជុំជាសាធារនោ ientation/public meeting	an Safeguards issues.	∭ ⊣) Nulīg9/Date	
	venue 10 10 1						ទ/Date លេខទូសេព្ទ	ស្ថាម័នរភូមិឃុំ		Wenue ភាថិតាទ នាម តើក្តេនាម	17.9	ющ	ត្វនាទី	ហត្ថលេខា (Signati		ស្ថាប័ន/ភូមិឃុំ Institution/village/comm
EU.1 (No)	នាម ពោត្តនាម (Name)		ЮЩ (Age)	តូនាទី (Position)	ហត្ថលេខា (ទ ព្រឹក	ល្អាច ល្អាច	Phone number	Some and a rel	(No)		(Sex)	(Age)	(Position) Proster 10 & - Proster 10 & - Proster 10 -	ព្រឹក ល្វា Cast		
1	So Drand	ď	65	60.570	-lef	-	088708716		02	and a series	13	38	SUSSE ADS	a zand	097799974 9889226044	50 50 50 50
2	5 ms	0	42	03/25	-04-				0.2	SAS 6 QUAT	15	14	maria Ac	lal gr	088/16/18/63	50 50
3	53/2 \$S	ø	41	-1-	-A-			er-	03	भूम क्रम भूम कासूर भूम कोद	25	28	movidme	Co)	088/4618163 0975777299 0976182-4	50 00
9	ator that	N	41	-	a				04	mg mich	d	31	mora 01 5	Mayo	09761824	10 5400
5	and has	V	91		9			Respe	06	TF 8	13	56	moved	al	25	50 00
Total pa	ю.			Female	panc:				Total p	ах:			Female pa			


2nd Public consultation meeting - Photos



		gdom of Caml ation Religion F (i)			
	CLTF for Aff	fected Propert	y for NRRPCP		
We, the donators: Name	Gender	Age	Occupation	າ	
Spouse	Gender	Age	Occupatio	n	
Village	_ Commune	District	Provi	nce	
We confirm that, we volun	tarily donate	locat	ed in Village name		
Commune/Sangkat	Distr	ict/municipality	Prov	vince	
For the NRRPCP subproje	ect				
We confirm that the public use and we do not a assets/property under this	request for any co				_ fo
Type of Property	Land siz	es (m²)	Number of Trees	Other structures	
					1
					1
Therefore, we hereby sign Witnesses No.1: Name and		-	household	and thumb print	
Witnesses No.2: Name an	d thumb print	Spouse	Name	and thumb print	
Witnesses No.3: Name ar	nd thumb print	-			
Date: day m	onth year	Date:0	laymonth	year	
Seen and Agreed, Chief	of village		Seen a Comm	nd Agreed, Chief of une	

Annex 9: Sample Certificate of Land/Asset Transfer for APs



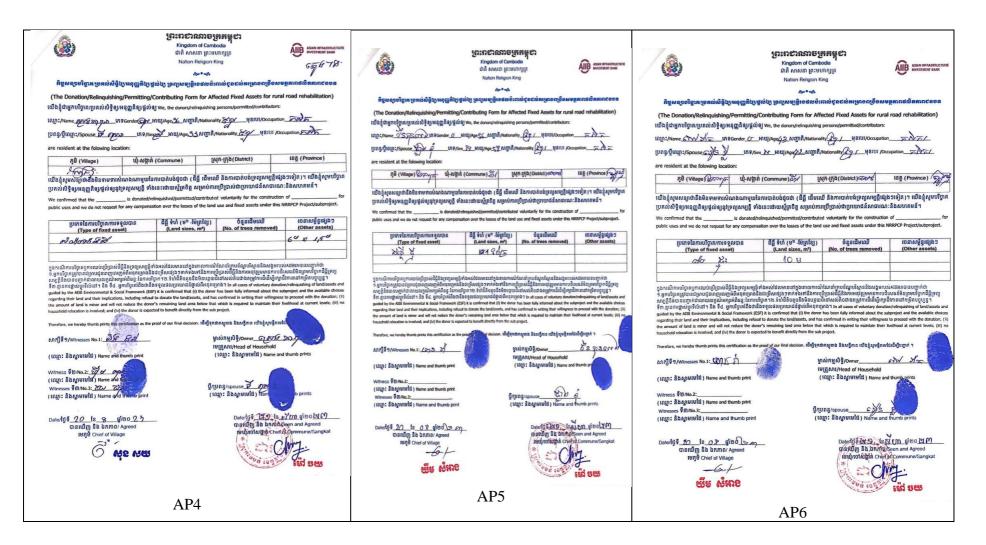

Annex 1	0:	Inventory	of	Loss	(loL)
---------	----	-----------	----	------	-------

	Chainage/station			l				Household Members		Monthly inc	ome (KHR)	Private		Affected Assets Identified													
No.		User/Owner	User/Owner	User/Owner	User/Owner	User/Owner					5 Disability (Y/N)						by Poor 1 and (N) Poor 2 (Y/N)					Land (outside	Affected Land (%)	Affected struture			No. of
	PK.start	Direction		(1/N)	(1/N)	eldery(I/N)	F001 2 (1/N)	Total	Working	Total	Per Person	ROW)	Luna (76)	Types	Area (m²)	Type of Trees	tree										
1	PK 1+150	L	Hong Srei	Ν	N	N	N	5	0	500,000	100,000	-	-	Stone Fence	16	-	0										
2	PK 1+175	L	Yun Chanra	Ν	N	N	N	5	0	4,000,000	800,000	-	-	Extended zinc roof	10	-	0										
3	PK 1+410	R	Meng Chhun	Ν	N	N	N	1	0	200,000	200,000.00	-	-	wire fence	19	-	0										
4	PK 1+800	L	Sreng Pearun	Ν	N	N	N	6	0	900,000	150,000	-	-	Extended zinc roof	6x1.5	-	0										
5	PK 6+000	L	Ben Konlegn	N	N	Ν	N	6	0	700,000	116,667	-	-	Stair	1	-	0										
6	PK 6+100	L	Sao Rath	N	N	N	N	4	0	1,000,000	250,000.00	-	-	Extended zinc roof	5	-	0										

Annex 11: Project Information Booklet





អម្រេទ ពទ្រឹទសទត្ថភាព៩លិតភាព៩ទទន

(ក្រោមសម្ភាររូបវ៉ន្តស្តារវិបក្តិកូវីង១៩) National Restoration of Rual Productive Capacity (NRRPC) Project (Take the CoVID-19 Child Rear wy Parity) ផ្តល់ចាំឡោយ្យធាននេះរយពខណ្ឌិតិបាលអង្គុខាតាម យ:ធនាគារទើនិយោគមោណ្ឌរមនាសម្ព័ន្ធអាស៊ី(កក្តី

trusL0446A)

Financed by the Government of the Kingdom of Cambodia through AIIB, Loan L0446A

ស្ថាម័នម្រតិបត្តិតស្រេ១ ត្រសូទអតិទឌ្ឍន៍៩នមន Executing Agency: Ministry of Rural Development (MRD)

ទា.សាទធារទេះទ្រាទ វាជរដ្ឋាភិបាលកម្ពុជាបានទទួលកម្វី ពីជនាគារវិនិយោគហេដ្ឋារចនាសម្ព័ន្ធអាស៊ីដាហិរញ្ញប្បទាន នៃគម្រោងពង្រឹងសមត្ថភាពផលិតភាពជនបទ។ គម្រោងនេះ ត្រូវបានកំណត់ជាអាទិភាពចម្បងរបស់រាជរដ្ឋាភិបាលដើម្បី ឆ្លើយតបទៅនឹងជំងឺកូវីដ-១៩ ហើយជាផ្នែកមួយនៃកម្មវិជីហេ ដ្ឋារចនាសម្ព័ន្ធជនបទ របស់ ជនាគារ AIIB សម្រាប់ផ្តល់ ហិរញ្ញប្បទានក្នុងការឆ្លើយតបទៅនឹងកូវីដ-១៩។ ក្រសួង អភិវន្ឍន៍ជនបទជាស្ថាប័នប្រត្តិបត្តិគម្រោង ជាអ្នកទទួលខុស ត្រូវ ដួចជា សម្របសម្រួលគម្រោង រៀបចំផែនការ គ្រប់គ្រង ហិរញ្ញវត្ថុ ធ្វើលទ្ធកម្ម ពិនិត្យតាមដាន និងវាយតម្លៃ។ រយៈពេល នៃការអនុវត្តគម្រោង ចាប់ពី ខែកុម្ភៈឆ្នាំ2021 ដល់ខែមិថុនា 2024។ Government of the Kingdom of Cambodia (GKC) CoVID-19 response and is a part of the proposed comprehensive rural infrastructure program to be funded under the AIIB CoVID-19 Crisis Response Facility to strengthen the GKC financial resources that have been impacted by the pandemic. The Executing Agency (EA) for NRRPCP is the Ministry of Rural Development (MRD) and is responsible for overall project coordination, planning, financial management, procurement and monitoring and evaluation (M&E). The Project implementation period is from February 2021 to Jure 2024.

ក.9. ថ្ងៃកាមោដ្ឋារមនាសន្ធ័ន្ធដូន៩នមន មានចំនួនទឹកប្រាក់ ៥៦.២លានដុល្លារ ក្នុងនោះកម្វីពីធនាតារ AIB

ចំនួន ៤៩.៦លានផុណ្ឈរ។ ផ្ទៃកហេដ្ឋារំបនាសម្ព័ន្ធផ្លូវជនបទរួម មាន៖ ការកែលំអរផ្លូវតាមលំនាំបាស់ដែលមានប្រវែង ២៣៥គ.ម សំណង់ស្ពានបាស់ ប្រព័ន្ធបង្ហូរទឹកដែលទ្រុឌព្រោម និងកែលំអ រដើម្បីឲ្យកាន់តែងាយស្រួលក្នុងការធ្វើដំណើរទៅផ្សារ សាលា រៀន មណ្ឌលសុខភាព និងស្របតាមគោលនយោបាយនៃការ អភិវឌ្ឍប្រកបដោយបីរភាពដោយបង្ខិតតំបន់ជនបទនឹង ទី ប្រជុំជន នៅតាមរាជជានី-ខេត្ត ព្រមទាំងបន្សាំទៅនឹងបម្រេប ម្រួលអាកាសជាតុ។ មានការកែលំអរដោយប្រើបាច់កាទសប្ដី ដូប ជាការជាំរុក្ខជាតិបែតង តាមជម្រាលផ្លូវ រួមផ្សំជាមួយនឹងការប្រើស ម្ការៈក្នុងមូលង្ឋាន ដើម្បីផ្ដល់សុវត្ថិភាពផ្លូនដល់អ្នកប្ដីដើង និង អ្នកជិះកង់ ព្រមទាំងលើកកម្ពស់សុវត្ថិភាពផ្លូនដល់អ្នកប្ដើដើង និង

Sub-Component A1- Rural Road Infrastructure (USD 56:20 million, of which AllB financing: USD 49:80 million) This will include (i) upgrading and climate proofing of about 235 kilometers of existing nural roads; (ii) adaptation of unstable bridges and collapsed drainage systems to improve access to markets, schods and health centers and sustain urban-rural linkages within the provinces as well as with the national capital and increase climate resilence; and (iii) greening of the embankments using bioengineered solutions and indigenous materials to accommodate safe walking and cycling and promote rural roads' safety

អ.២ ផ្លែកធិតម្មភាគ សំរោត សិចអេលទ័យ៩លេខធ មានចំនួនទឹកប្រាក់ ៧.៣លានដុល្លារ ក្នុងនោះកម្ចីពីជនាគារ AIB ចំនួន ៦.៤លានដុល្លារ។ ផ្នែកទឹកស្អាត និងអនាម័យជនបទ រួមមាន៖ ការស្តារស្រះសហគមន៍ចំនួន ៧៥ ដោយប្រើបច្ចេក ទេសសមស្របសម្រាប់ធ្វើជម្រាលស្រះទឹកឡើងវិញ។ ស្រះសហ គមន៍ដែលត្រូវសាងសង់ថ្មីចំនួន ៧៥ រួមទាំងផ្តល់ជូននូវហិក្ខាទឹក ស្អាត ការសំអាត និងអនាម័យ។ គួរផែនទីដើម្បីកំណត់ទី តាំងប្រើប្រាស់ទឹកស្អាតក្នុងភូមិ ដែលមានបម្លាយពី ២៥០ ម៉េត្រ ទៅ ៣៥០មែត្រ ដើម្បីសម្រាលបន្ទុកដល់ស្ត្រីនិង កុមារ។ ជាពិសេស ដើម្បីលើកកម្ពស់ទឹកស្អាត ការសំអាត និង អនាម័យយើងក៏មានការផ្សព្វផ្សាយនូវវិធានការការពារជំងឺក្ វីត-១៩ តាមរយៈការលាងសម្អាតដៃឲ្យបានស្អាតល្អ ជូនដល់ ជនងាយរងគ្រោះនៅតំបន់ជនបទ ព្រមទាំងកៀងគាប្រជា ពលរដ្ឋក្នុងសហគមន៍ឲ្យយល់ដឹងពីដំណើរការនៃការថែទាំ និង ការប្រើប្រាស់ ទឹកស្អាត ការសំអាត និងអនាម័យដែលជា ផ្នែកមួយនៃការទប់ស្កាត់នៃការរីករាលដាលនៃជំងឺក្សីដ-១៩ ជាបនាន់។

Sub-Component A2 - Water Sanitation and Hygiene (USD 7.30 million of which AllB financing: USD 6.40 million) This will include (i) Restoring and climate proofing of about 75 community ponds with a strengthering of the embankments using bioengineered solutions; (ii) construction of 75 new community ponds and associated WASH facilities; (iii) mapping of safe water access points in the village within a 250 to 350 meters range from each house to reduce water duties allocated to women and children; (iv) promoting sanitation and hygiene, especially hand-washing pradices to deliver basic CoVID-19 prevention measures to the vulnerable groups of the rural population; and (v) community mobilization for the design, operations and maintenance and raising community awareness on safe water use, sanitation and hygiene

១.យន្តភាអដាះត្រាយចណ្តឹ១

យន្តការដោះស្រាយបណ្ដឹងត្រូវបានបង្កើតតាមខេត្តនីមួយៗ ដើម្បី ដោះស្រាយបណ្ដឹងតវ៉ាស្របតាមគោលនយោបាយកិច្ចការពារ សុវត្ថិភាពឃិស្ថាននិងសង្គមរបស់ធនាគាវិនិយោគហេដ្ឋារចនា សម្ព័ន្ធអាស៊ី។ ប្រជាពលរដ្ឋក្នុងសហគមន៍ អាចចូលមើលយន្តកា ដោះស្រាយបណ្ដឹង និងបង្ហាញជាកង្វល់នៃផលប៉ះពាល់នានាបាន តួយ៉ាងក្រុមជនងាយងគ្រោះ ដែលមានស្ត្រី និងយុវជនជាដើម។ ក្នុងនោះ ការទទួលពាក្យបណ្ដឹងអាចធ្វើបានតាមរយៈការជួបផ្ទាល់ ការធ្វើលិខិតជាលាយលក្ខណ៍អក្សរនិងតាមរយៈទូរស័ព្ទឬអ៊ី ម៉ែល។ នីតិវិធីបណ្ដឹងគវ៉ា នឹងស្រាយបំភ្លឺឲ្យបានកាន់តែ ប្បាស់នៅក្នុងក្របខណ្ឌផែនការ គ្រប់គ្រងបរិស្ថាននិង សង្គមដែលមាន ៤ ដំណាក់កាលដូចជា៖

B. Grievance Redress Mechanism: A GRM has been established in each province in compliance with the AIIB ESS and as required in the Project ESMPF to avoid and address community concerns

A. Project Background The Government of the Kingdom of Cambodia (GKC) has received a loan from Asian Infrastructure Investment Bank (AIIB) in the form of a loan to assist in financing the National Restoration of Rural Productive Capacity Project (NRRP CP). This project has been identified as an immediate priority of The

and assist the project to maximize environmental and social benefits. The GRM is accessible to diverse members of the community, including vulnerable groups such as women and youth. Multiple points of entry, including in person meetings, written complaints, telephone conversations and e-mail are available. The GRM is fully explained and elaborated in the Project ESMPF and includes the following four stages:

ដំណាក់កាលទី១៖

គ្រួសារងផលប៉ះពាល់អាចដាក់ពាក្យបណ្ដឹងឬប្ដឹងផាល់មាត់ ឬ ដាក់លិខិតជាលាយលក្ខណ៍អក្សរទៅកាន់មេភូមិនឹងមេឃុំ។ អ្នកទទួលពាក្យបណ្ដឹងនឹងកត់ត្រាបញ្ជាក់ពីសេចក្ដី និង ដើមហេតុនៃពាក្យបណ្ដឹង។ ដោយឡែកបើស្ថិតក្នុង អំឡុង ពេល១៥ថ្ងៃ ម្នាស់បណ្ដឹងមិនបានទទួលដំណឹងពីអ្នក ទទួលពាក្យបណ្ដឹងឬមិនពេញចិត្តនឹងដំណោះស្រាយ នោះ ម្នាស់បណ្ដឹងអាចនាំយកពាក្យបណ្ដឹងរបស់ខ្លួនទៅ ការិយាល័យថ្នាក់ស្រុក។

Stage 1: An AP can present their complaints and grievances verbally or in writing to the willage chief, commune chief. The receiving agent will be obliged to provide immediate written confirmation of receiving the complaint. If after 15 days the aggrieved AP does not hear from the village and commune chief, if she is not satisfied with the decision taken in the first stage, the complaint may be brought to the District Office.

ដំណាក់កាលទី២៖ ការិយាល័យស្រុកនឹងដោះស្រាយពាក្យ បណ្តឹងក្នុងរយៈពេល ១៥ ថ្ងៃ ជូនម្ចាស់បណ្តឹង។ បើសិនជាប ណ្តឹងរបស់លោកអ្នកនៅតែមិនបានដោះស្រាយនៅដំណាក់ កាលនេះទេ ការិយាល័យស្រុកនឹងបញ្ជូនពាក្យបណ្តឹងទៅអនុគ ណៈកម្មការបណ្តឹងតវ៉ា ខេត្ត ជាអ្នកដោះស្រាយបន្ត។

Stage 2: The District Office has 15 days within which to resolve the complaint to the satisfaction of all concerned. If the complaint cannot be solved at this stage, the District Office will bring the case to the Provincial Grievance Redress Committee (PGRC).

ដំណាក់កាលទី៣៖

អនុគណៈកម្មការបណ្ដឹងតាំខេត្ត នឹងជួបជាមួយម្ចាស់បណ្ដឹង ហើយដោះស្រាយបណ្ដឹង។ បន្ទាប់មកអនុគណៈកម្មការខេត្ត ស្នើឲ្យពិនិត្យឡើងវិញ និងវាស់វែងលំអិត តាមរយៈក្រុមការងារ ភូមិបាលស្រុក។ ក្នុងរយៈពេល ៣០ថ្ងៃ នៃការជាក់ពាក្យបណ្ដឹង អនុគណៈកម្មកាលណ្ដឹងតាំខេត្ត ត្រូវសម្រេចជាលាយលក្ខណ៍អក្ស រួចដាក់ជូនទៅសមាជិកអនុគណៈកម្មការខេត្ត ក៏ដូចក្រសួង អភិវឌ្ឍន៍ជំនបទនិងគ្រួសារងផលប៉ះពាល់ស្នាស់បណ្ដឹង។

Stage 3: The PGRC will meet with the aggreved party to try to resolve the situation. The Committee may ask for a review of the detailed measurement survey by the DLMUPCC. Within 30 days of the submission of the grevance, the PGRC must make a written decision and submit copies to the PGRC members, the MRD/PMU and the AP(s)

ដំណាក់កាលទី៤៖

ប្រសិនបើពាក្យប្ដឹងនៅមិនទាន់ដោះស្រាយពីអនុគណៈកម្ម ការបណ្ដឹងតវ៉ាខេត្ត ឬ ម្នាស់បណ្ដឹងមិនពេញចិត្តនឹង ងំណោះ ស្រាយ ពួកគាត់អាចបន្តដាក់ពាក្យបណ្ដឹងទៅកាន់ តុលាកាខេត្ត ដែលនេះជា ដំណាក់កាលចុងក្រោយ នៃពាក្យបណ្ដឹង។ តុលាការនឹងរៀបចំសេចក្ដីសម្រេចជាលាយលក្ខណ៍អក្សរ និងដាក់ជូនមកក្រសួងអភិវឌ្ឈន៍ជនបទ/ អង្គភាពគ្រប់ត្រងតម្រោង មន្ទីអភិវឌ្ឍន៍ជនបទ និងគ្រួសាររងជលប៉ះពាល់/ម្ចាស់បណ្ដឹង។ បើភាគីណានៅតែមិនពេញចិត្ត ជាមួយនិងការកាត់ក្ដីរបស់ តុលាការខេត្តពួកគាត់អាចឡើងទៅថ្នាក់លើបន្តទៀត។

Stage 4: If the aggrieved AP does not hear from the PGRC or is not satisfied, she can bring the case to Provincial Court. This is the final stage for adjudicating complaints. The Court will make a written decision and submit copies to the MRD/PMU, PDRD and the AP s). If any party is still unsatisfied with the Provincial Court judgment, he or she can bring the case to a higher level court.

ប្រសិនបើលោកអ្នកមានមន្ទិលកង្វល់ ការបញ្ចេញមតិ ការព្រួយ បាម្ភឬបណ្តឹងតាំទាក់ទងទៅនឹងហេតុផលប៉ះពាល់ជាអវិជ្ជមាន របស់គម្រោងទៅលើបរិស្ថាន ទ្រព្យសម្បត្តិ និងជនជាតិ ដើមភាគតិចព្រមទាំងអំពើហិង្សាទាក់ទងនឹងយេនឌ័រ/ការ បៀតបៀនផ្លូវភេទនៃការអនុវត្តគម្រោង។ សូមមេត្តា ទាក់ទងតាម័រយៈ៖

- មន្ត្រីទទួលបណ្ដឹងថ្នាក់មូលដ្ឋាន:
- ឃុំ ដារ លោក ម៉ៅ ចយ
- ទូវស័ព្ទ :+855 88 27 62 116

ឃុំ ក្រែក លោក វង វ៉ាន់ស៊ាន

ទូវស័ព្ទ :+855 88 61 65 888

អង្គភាពអនុវត្តតម្រោងត្បូងឃ្មុំ PIU:

លោក អាន ស៊ីណា

ទូវស័ព្ទ : +855 12 20 50 50

E-mail:

អង្គភាពគ្រប់គ្រងគម្រោង PMU:

លោកស្រី ចេង ម៉ារ៉ាឌី

ទូវស័ព្ទ: +855 66 93 53 63

តេឡេក្រាម/Telegram: +855 10 227091

Facebook:https://www.facebook.com/National-Restoration-of-Rural-Productive-Capacity-Project-103071342356669/

E-mail:chengmarady123@gmail.com

If you have any complaints relating to the negative impacts of this Project on your environment, property/assets, and indigenous peoples, as well as gender-based violence/sexual harassment, please contact via

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
Design and Pre-cor	nstruction				•	· · ·	
The subproject is impacted by future climate change	Increased temperatures may lead to increased/weather resilience (WR), affecting Double Bituminous Surface Treatment (DBST) and Reinforced Concrete (RC) roads infrastructures. Increased rainfall may cause flooding and emerging road infrastructures and damaged them.	D3	Long- term	Alternative designs for Double Bituminous Surface Treatment (DBST) and Reinforced Concrete Roads will incorporate all relevant recommendations, specifications and guidelines to tailor the type of DBST and RC roads.	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict PIU and PMU
Grievance Redress Mechanism (GRM)	Local authority through its existing commune/Sangkat complaint mechanism with transparent box. MRD/EA schedules to train PIU and confirms the GRM in each subproject province.	D1	Short- term	Immediate action for any complaint regarding road infrastructure upgrading and community ponds	Includes in the program cost	Likely affected person/private donator from infrastructure improvement	Local authorities- village/commune/di strict, PIU and PMU
Incorporate environmental and social management into contract documents/bidding	Environmental measures in this EMP or Environmental Code of Practice need to be binding so that they will be fully implemented	D3	At tendering	Contract documents: Preparation of the environment section in the ToR for bidders and environmental contract clauses for contractors comprising the special conditions for the protection of soil, water & air resources.	Design cost	Design consultants/EAs	Local authorities- village/commune/di strict, PIU and PMU
Loss of roadside trees	Fruit trees and other commercial timbers usually planting/growing along the road sides	D2	Medium term	Tree clearing should be avoided as much as possible, and if unavoidable, the damaged trees need to be replaced by re-planting new road side trees. Incorporate replacing damages in project costs Consult communities in project design and public awareness.	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU
Loss of natural trees /protected area for borrow	If the designated borrow pit is on protected area/natural trees	D2	Medium term	Develop alternative uses for borrow pit areas where is not negative impact on livelihood	Included in the program cost	Contractor/ subcontractors' Social and	Local authorities- village/commune/di strict, PIU and PMU

Annex 12: Environmental and Social Code of Practice

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
pits				and protected areas Incorporation of replacing damages during project design.		Environmental Safeguards	
Loss of agricultural land for borrow pits	If the designated borrow pit is on agricultural land (fertilizer)	D2	Medium term	Develop alternative uses for borrow pit areas where is not negative impact on livelihood and protected areas. Incorporation of replacing damages during project design.	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU
Landmines and UXO	Project works will take place in areas that are already well trafficked. Thus, it is not likely to have a significant landmines/UXO risk. Pailin and Koh Kong target subprojects provinces will conduct public consultations/field assessment about the landmines/UXO risk at the proposed subproject site. However, a borrow pit site is unknown yet that it could be harmful on landmines/UXO?	D3	Medium term	-Subprojects will rehabilitate on the existing roads without widening. Nevertheless, risks remain since there may be deep seated mines that could be exploded by heavy construction equipment, for instance Pailin and Koh Kong provinces, hence consultative meetings with local communities are necessary to know clearly where there are risks of landmines or UXO. Unsafe areas should be cleared before project implementation.	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU
Funeral areas	Earthen tomb/stupa in pagoda/common place were located near/vicinity of the sub project especially community ponds	D3	Long Term	Avoiding or reducing the impacts by Preventing/built embankment of water catchment into community pond.	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU
Resettlement/ Land Acquisition	Private assets including land and economic trees	D3	Long Term	Included in Resettlement Plan- if any.	Included in the program cost	Contractor/ subcontractors' Social and GDR	Local authorities- village/commune/di strict, PIU and PMU
Construction Phas	e	•				•	
Air pollution, land and water contamination,	Double Bituminous Surface Treatment (DBST) production, and application	D2	Short- term	- Piles of aggregates at sites should be used/or removed promptly, or covered and placed in non-traffic areas	Included in the program cost	Contractor/ subcontractors' Social and Environmental	Local authorities- village/commune/di strict, PIU and PMU

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
and traffic & access problems,				 Stored DBST materials well away from all human activity and settlements, and cultural (e.g., schools, hospitals), and ecological receptors. Bitumen production and handling areas should be isolated. Contractors must be well trained and experienced with the production, handling, and application of bitumen. All spills should be clean immediately and handled as per hazardous waste management plan, and according to Government regulations. Bitumen should only be spread on designated road beds, not on other land, near or in any surface waters, or near any human activities. Bitumen should not be used as a fuel. 		Safeguards	
Dust generation	Dust caused by the transportation of construction materials and goods (contractors and/or commuters/passengers/ Drivers/ operators)	D2	Short- term	 The contractor/sub-contractor will be: Spray water at least twice a day on unpaved areas, haul roads and exposed dust-prone stockpiles. Increase frequency of water spraying during windy conditions. During removal of existing pavement and during backfilling, conduct water spraying to suppress dust. Control vehicle speed to less than 30 km/h in unpaved areas. Post the notice on the construction works and the speed limit 	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
				 sign in these areas. Trucks carrying dry construction materials such as earth; aggregate will be covered with tarpaulins or other suitable cover. 			
Noise and vibration	Noise caused by the concentration of machinery working in one area, plus haulage vehicles, can cause a range of impacts from nuisance to health problems. Noise near schools, health centres, and pagoda can disrupt services.	D2	Short- term	 Construction after 6pm within 300m of residences shall be strictly prohibited. During daytime construction, the contractor will ensure that: Temporary anti-noise barriers will be installed to shield sensitive receptors (if any) within 50m of the construction site. 	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU secretariat
Generation of solid and liquid waste	The solid wastes are caused mainly from/by camp sites, kitchen, human waste, and debris of construction materials.	D2	Short- term	 Manage general solid and liquid waste from construction in line with Government regulations, and will cover, collection, handling, transport, recycling, and disposal of waste created from construction activities and worker force. Make clear arrangements for storage and transportation of all hazardous and non- hazardous waste to an authorized and approved disposal point (approved by Provincial Department of Environment). Store all solid waste in containers with lids, more than 25m from all surface water, water supplies, and cultural and ecological sensitive receptors. 	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
				 Prohibit burning of waste at all times; Provide all vehicles/drivers with plastic bags for waste collection and prevent any unauthorized waste disposal with particular attention paid to prevention of waste entering water ways including drainage ditches Provide a schedule of solid and liquid waste pickup and disposal must be established and followed that ensures construction sites are as clean as possible. All spills must be cleaned up completely with all contaminated soil removed. 			
Traffic management	Traffic congestion occurs during civil work implementation such as materials stockpiling, reinforcement and concrete casting activities.	D2	Short- term	 The contractor/subcontractor should formulate Traffic Management Plan. This should include the following: oriented their drivers or equipment operators to comply with the required speed limit. Driving at low speeds, especially in populated areas-market, school, hospital Keeping the roadway or bypass accessible to commuters to avoid traffic jams and follow lance. Parking at designated areas. The contractor/sub- contractor should employ flag persons to manage the traffic and closely coordinate 	Included in the construction cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
Community Environmental	Nature of Impacts Causing by construction plant and equipment operations during	*Significance	Short-		Costs Included in the program cost		Who is supervising
Health and Safety (EHS)	civil work implementations		term	 accessible to commuters to avoid traffic jam/congestion Park at designated area. Detour road should be provided and accessible to commuters (if any) Workers need to be aware of the following general rules: (i) no alcohol/drugs on-site; (ii) prevent excessive noise; (iii) no illegal activities such as, but not limited to gambling, and hunting farm animals in the area; (iv) trespassing on private/commercial properties adjoining the site is forbidden; (v) no littering 			

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
Occupational Environmental Health and Safety (OEHS)	Staff and workers Occupational Environmental Health and Safety during operations of civil works implementations	D2	Short- term	 The occupational safety plan should have provisions on (i) providing personal protective equipment (PPE) like hard hats, safety gloves, ear mufflers to all workers; (ii) providing occupational health and safety training to all workers (i.e. first aid measures, prevention of malaria, diarrhea, HIV/AIDS); A trained first aid personnel and health facility should be provided on site and in camp site. Potable water and sanitary facilities should be provided to workers and staff. The contractor/ subcontractor should incorporate on the health and safety plan the education of workers and staff about sexually transmitted disease (if any). 	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU
Generation of employment	Skilled/Unskilled workers are needed/created during the lifespan of civil work implementations	(+)	Short- term	The contractor/subcontractor should employ from local villages/communes including woman unskilled workers.	Included in construction cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU
Implementation of Construction Workers and Camp	Contamination of water, soil, waste production and social issues	D 2	Short term	 If a camp for construction workers is required, the contractor will set out a management plan which includes: a) A map showing camp lay out, welfare facilities, and first aid kit locations. b) Accommodation facilities including separate toilets for male and female 	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
	Nature of Impacts	*Significance	Duration		Costs		Who is supervising
				and female workersi) Provide toilets for male and female construction			

Potential impacts	Nature of Impacts	*Significance	Duration	Mitigation measures and/or	Costs	Who is	Who is supervising
and issues				 safeguards workers with a cleaning schedule j) The contractor will give priority to local labor force and retain evidence of how local labor recruitment efforts were undertaken. 3. The contractor will ensure training is delivered to construction workers on the following and the contractor will provide a training schedule: k) HIV Aids education awareness l) Cambodian laws for foreign labor regarding: hunting, fishing and traffic rules m) Grievance Redress Mechanism – how to deal with affected people who make a complaint to a worker n) Occupational Health and Safety and Emergency Procedures. o) Prevention of CoVID-19 pandemic; Health and 		implementing	
Gender based violence	Unsafe workplace environment due to offensive, abusive or violent behaviour	D2	Short- term	Safety • The contractor will be required to maintain a safe and secure site environment with zero tolerance of gender based violence (GBV), sexual exploitation and abuse (SEA) and sexual harassment (SH) by ensuring:	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
CoVID-19 pandemic	Worldwide and nationwide	D4	Long- term	 The contractor will provide safe, suitable and comfortable accommodation, kitchen, dining and sanitary facilities (toilet and bath); with an ample supply of clean water and the bathrooms have liquid soap provided for hand washing. First aid supplies and personal protected equipment (PPE) will be provided for workers including face masks. Camp surroundings will be kept clean to prevent the spread of other vermin and insect vectors of disease. A trained health & safety (H & S) officer will be designated by the contractor to ensure the proper implementation of the environment, health and safety programs and induction and training of the workforce during the construction phase. For security and to maintain order in the camp and to avoid social conflicts with the local residents, camp rules will be strictly enforced including a nighttime curfew. The contractors H&S plans will be updated to 	Included in the program cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU

Potential impacts	Nature of Impacts	*Significance	Duration	Mitigation measures and/or	Costs	Who is	Who is supervising
and issues				safeguards		implementing	
				reflect the risk mitigation			
				measures in respect of			
				CoVID-19 and these need			
				to be reviewed by			
				Environment Safeguard			
				Specialist to provide			
				recommendations to the			
				PMU/Contractor (H & S			
				Officer) and to monitor the			
				implementation of these			
				H&S plans.			
				Special precautions will be			
				included to provide for			
				enhanced cleanliness on			
				site for the workers and			
				ensuring that over-			
				crowding of dormitories			
				and canteen facilities are			
				avoided to enable			
				adequate social distancing			
				and regularly disinfected.			
				 The hiring of local 			
				unskilled labor from within			
				the villages will be			
				maximized to avoid the			
				importation of laborers			
				from other areas, and for			
				skilled workers who are			
				not from the area they			
				should avoid close			
				interaction with residents			
				in the villages.			
				All persons who are			
				working on the			
				construction site will be			
				advised to immediately			
				report any symptoms of			
				CoVID-19 to the site			
				manager/H&S Officer			
				immediately and make			
	<u> </u>			arrangements to self-			

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
				 isolate to avoid the risk of spreading infection. The H&S Officer at the construction site will be equipped with a digital thermometer to enable them to regularly check the temperatures of anyone who shows symptoms. 			
Operations and ma	intenance						
Road maintenance (after newly concrete casting of RC roads)	The vehicles (all types/kinds) will traverse on the reinforced concrete (RC) road after newly/immediately concrete casting.	D3	Short- term	 Pouring water onto RC road/and use the materials absorbing water to cover and maintain humidity for at least one week. Use concrete rings/concrete posts to prevent/barricade the vehicles/truck traversing through RC roads (at least for 21 days after concrete casting). For heavy trucks will allow to use after 28 days' concrete casting. Common cars will allow to use RC road after 21 days of concrete casting. For motorbikes (without trailers) are allowed to use the RC road after concrete casting few days (i.e. 2 or 3 days). 	Included in construction cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU
Road safety	Regular commuters/ passengers and drivers traversing along the road lines	D2	Long- term	 Providing sufficient road signage, warning ahead of road construction and upgrading. 	Included in construction cost	Contractor/ subcontractors' Social and Environmental Safeguards	Local authorities- village/commune/di strict, PIU and PMU

Potential impacts and issues	Nature of Impacts	*Significance	Duration	Mitigation measures and/or safeguards	Costs	Who is implementing	Who is supervising
	Nature of Impacts	*Significance	Duration	 safeguards Provides flag persons to manage the traffic during construction Provide traffic sign board at corner or curve road, especially at school, hospital, and pagoda/mosque/church market areas. Road safety device/furniture including traffic sign board (especially at corner or 	Costs		Who is supervising
Traffic accident	Good roads/smooth roads the drivers, commuters/passengers/operators will drive faster, especially the drink driving/ drunk drivers!	D3	Long term	 curve road and school, hospital and market centers) and speed bump (for reducing speed, especially at school, hospital, and pagoda/mosque/church market areas). Public awareness and campaign on traffic sign and national traffic regulation to educate communities to get understanding on the traffic thus the traffic accident will be reduced or avoided. 	Included in construction cost	Local authorities- village/commune/di strict, PIU and PMU	Local authorities- village/commune/di strict, PIU and PMU

Annex 13: Environmental and Social Monitoring Plan

The Environmental and Social Monitoring Plan will be used by the primary stakeholders - local authorities/PIU/PMU for monitoring the application of the ESCoP.

What will be monitoring	Place for monitoring	How to monitor	When monitoring will be done	Who will be responsible for monitoring?
Dust	200-meter radius from construction site/road line	Visual observation; feedback from villagers living along the proposed road line	Daily observation	Local authorities- village/commune/di strict, PIU and PMU
Noise and vibrations	200-meter radius from construction site/road line	Auditory observation; monthly reporting	Daily observation	Local authorities- village/commune/di strict, PIU and PMU
Solid waste	Road construction site; MRF used by contractor	Consultation with local authorities; monthly reporting on waste segregation and management	Daily observation	Local authorities- village/commune/di strict, PIU and PMU
Sanitation	Road construction site	Visual observation; monthly reporting	Prior to start of construction; daily observations	Local authorities- village/commune/di strict, PIU and PMU
Safety and occupational health	Road construction site	Visual observation; consultation with district and MRD/EA monthly reporting	Daily	Local authorities- village/commune/di strict, PIU and PMU
Disruption to local market	Local market in Kampong Prasat village	Consultation with local authorities and market vendors; monthly reporting,	Daily	Local authorities- village/commune/di strict, PIU and PMU
Traffic management	Road construction site and roads within the vicinity	Visual observation; consultation with districts and MRD/EA; monthly reporting	Daily	Local authorities- village/commune/di strict, PIU and PMU
Road maintenance (newly concrete casting)	Road construction site	Visual observation; reports from local authorities; beneficiaries	Daily, after concrete casting for the period of 21 day and 28 days for heavy trucks	Local authorities- village/commune/di strict, PIU and PMU
CoVID-19-pandemic	Road construction site/civil works implementation	Temperature check and testing (if any), using infrared thermometer	Daily Worked day at site	Local authorities- village/commune/di strict, PIU and PMU

MRD Contract Package:	Inspector's Name Position
Inspection Date:	:

Environmental Code of Conduct (Mitigating Macaurae)	ComplianceStatus			Remarks/ Reasons	Recommendations	Deadline
Environmental Code of Conduct (Mitigating Measures)	Yes	No	Partially	for Partial or Non- Compliance	Recommendations	Deadine
Dust Control						
Storage areas of construction materials such as sand, gravel, cement, etc., have provisions that prevent them from being blown away towards sensitive receptors						
Trucks transporting construction materials (i.e. sand, soil, cement, gravel, etc.) are tightly covered.						
Construction vehicles have speed limits (typically 20 km/hour or less) along areas where sensitive receptors are located.						
Dust control by watering/water sprinkling in a road construction zone?						
Noise Levels						
Prior notification to the community/local authorities on the constructionschedule.						
Noisy construction activities are avoided in the vicinity of sensitive receivers.						
Construction traffic routes are defined in cooperation with local communities and traffic police.						
Solid Waste						

	ComplianceStatus			Remarks/ Reasons for Partial or Non-	Recommendations	Deadline
Environmental Code of Conduct (Mitigating Measures)	Yes	No	Partially		Recommendations	Deadline
Garbage bins and temporary storage facilities for construction wastes, domestic solid wastes, and segregated wastes are provided within the project site/subproject site.						
Regular collection and disposal of wastes (by contractor/subcontractor or authorized third party) to sites approved by local authorities? and/or subnational levels?						
Wastes are not dumped into watercourses, agricultural land, and surrounding areas.						
Traffic Management and Local Access			11			L
Signs advising that construction is in progress are provided, particularly where the alignment crosses existing roads and where construction related facilities are located.						
Flag persons are employed to regulate traffic, especially in potentially hazardous areas.						
Traffic advisory signs (to minimize traffic build-up/populated areas) are posted in coordination with local authorities and/or sub- national levels.						
Construction activities and schedules are coordinated in advance with local authorities, community representatives/beneficiaries, businesses, and schools.						
Existing access routes are maintained (whenever feasible)						
Provision of alternative access and/or parking when impacts to principal access routes and parking areas cannot be avoided?						
Adequate informational and directional signage to improve alternative access function						

Environmental Code of Conduct (Mitigating Macaurae)	ComplianceStatus			Remarks/ Reasons for Partial or Non-	Recommendations	Deadline
Environmental Code of Conduct (Mitigating Measures)		No	Partially		Recommendations	Deadime
Occupational Health and Safety						·
Orientation for construction workers regarding health and safety measures, emergency response, and prevention of HIV/AIDS and other diseases						
Do not discriminate against workers in respect of employment and occupation.						
Effective measures to ensure a safe and secure work environment and to prevent any incidence of gender-based violence against workers						
Ensure that workers are not restricted from developing a legally permissible means of expressing their grievances and protecting their rights regarding working conditions and terms of employment.						
First aid facilities that are readily accessible to workers? and staff?						
Adequate and clean housing and sanitation facilities for all workers/staff at the workers'/construction camps.						
Reliable supply of water for drinking, cooking, and washing purposes at the staff/workers' camps						
Separate hygienic sanitation facilities/toilets and bathing areas with sufficient water supply for male and female workers/staff.						
Proper collection and disposal of solid wastes within the workers'/ construction camps						
Workers are provided and use appropriate and complete safety equipment such as safety boots, protective clothes, breathing mask, ear protection, helmets, gloves, etc. Covid-19, workers, and staff are provided with face masks, sanitized alcohol, gel, and temperature check by using an infrared thermometer.						

Environmental Code of Conduct (Mitigating Measures)	ComplianceStatus			Remarks/ Reasons for Partial or Non-	Recommendations	Deadline
Environmental Code of Conduct (Mitigating Measures)	Yes	No	Partially		Recommendations	Deauline
Public Safety			· · ·			
Signage is installed at the periphery of the construction site to warn and direct traffic and pedestrians.						
Safe passageways for pedestrians crossing the construction site?						
Appropriate safety barriers and warning signs are installed in areas that pose safety risks such as open excavations, drainages, etc.						
Construction site						
Availability of proper storage for fuel, oil and construction materials						
Proper maintenance of construction machinery and equipment (prevent leakage of fuel, oil, lubricants, etc.)						
Restoration of the area of construction sites and camps when the construction works are completed						
Employment (Unskilled labor)						
At least 25% of unskilled worker has to be employed as women.						
Equal pay for equal work.						
Do not use child labor						

(Inspector's Name) : Mr.

ហត្ថលេខា (Signature) :

(Agreed by) : PIU Mr.

ហត្ថលេខា (Signature) :